



Colour Television Service Manual

28DN2

C28ER57N (W.Europe)

Service Ref. No. C28ER57N-00

Service Ref. No. C28ER57N-01


PRODUCT CODE: 1113 27208

ORIGINAL VERSION: Chassis No. EB4-A

Note

This TV receiver will not work properly in foreign countries where the television transmission system and power source differ from the design specifications. Refer to the specifications for the design specifications

Give complete "SERVICE REF. NO." for parts order or servicing, it is shown on the rating sheet on the cabinet back of the TV set.

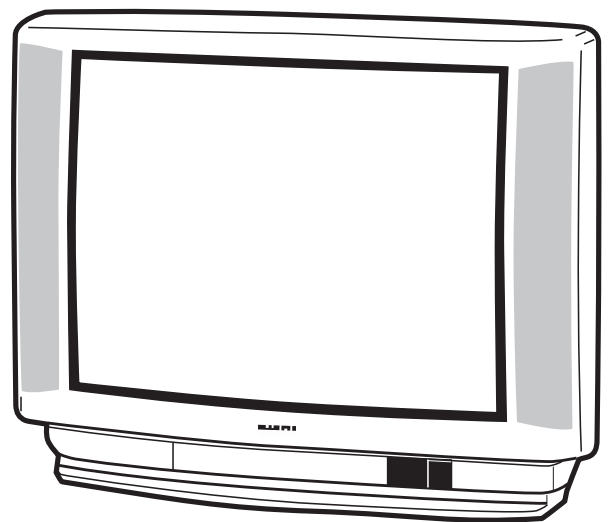

Specifications

Power source	AC 220~240V 50Hz
Television system	System B/G
Colour system	PAL
Receiving channel	VHF: E2-E12 CATV: X, Y, Z, S1-S41 UHF: #21~69
Aerial input impedance	75ohm
AV terminal	
21 Pin socket	CENELEC standard
Sound output(Music)	12 watts X2
Picture tube	70cm diagonal, 110 degree
(Visible picture diagonal)	66cm
Dimensions (WxHxD)	736 x 596 x 500mm
Weight	32 Kg

SAFETY PRECAUTION

- 1: An isolation transformer should be connected in the power line between the receiver and the AC line when a service is performed on the primary of the converter transformer of the set.
- 2: Comply with all caution and safety-related notes provided on the cabinet back, inside the cabinet, on the chassis or the picture tube.
- 3: When replacing a chassis in the cabinet, always be certain that all the protective devices are installed properly, such as, control knobs, adjustment covers or shields, barriers, isolation resistor-capacitor networks etc. Before returning any television to the customer, the service technician must be sure that it is completely safe to operate without danger of electrical shock.

X-RADIATION PRECAUTION


The primary source of X-RADIATION in the television receiver is the picture tube. The picture tube is specially constructed to limit X-RADIATION emissions. For continued X-RADIATION protection, the replacement tube must be the same type as the original including suffix letter. Excessive high voltage may produce potentially hazardous X-RADIATION. To avoid such hazards, the high voltage must be maintained within specified limit. Refer to this service manual, high voltage adjustment for specific high voltage limit. If high voltage exceeds specified limits, take necessary corrective action. Carefully follow the instructions for +B1 volt power supply adjustment, and high voltage adjustment to maintain the high voltage within the specified limits.

PRODUCT SAFETY NOTICE

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by mark /! in the parts list and the schematic diagram designate components in which safety can be of special significance. It is particularly recommended that only parts designated on the parts list in this manual be used for component replacement designated by mark /! . No deviations from resistance wattage or voltage ratings may be made for replacement items designated by mark /! .

BLOCK DIAGRAM

This is a diagram for all models and therefore differs slightly from the actual block diagram.

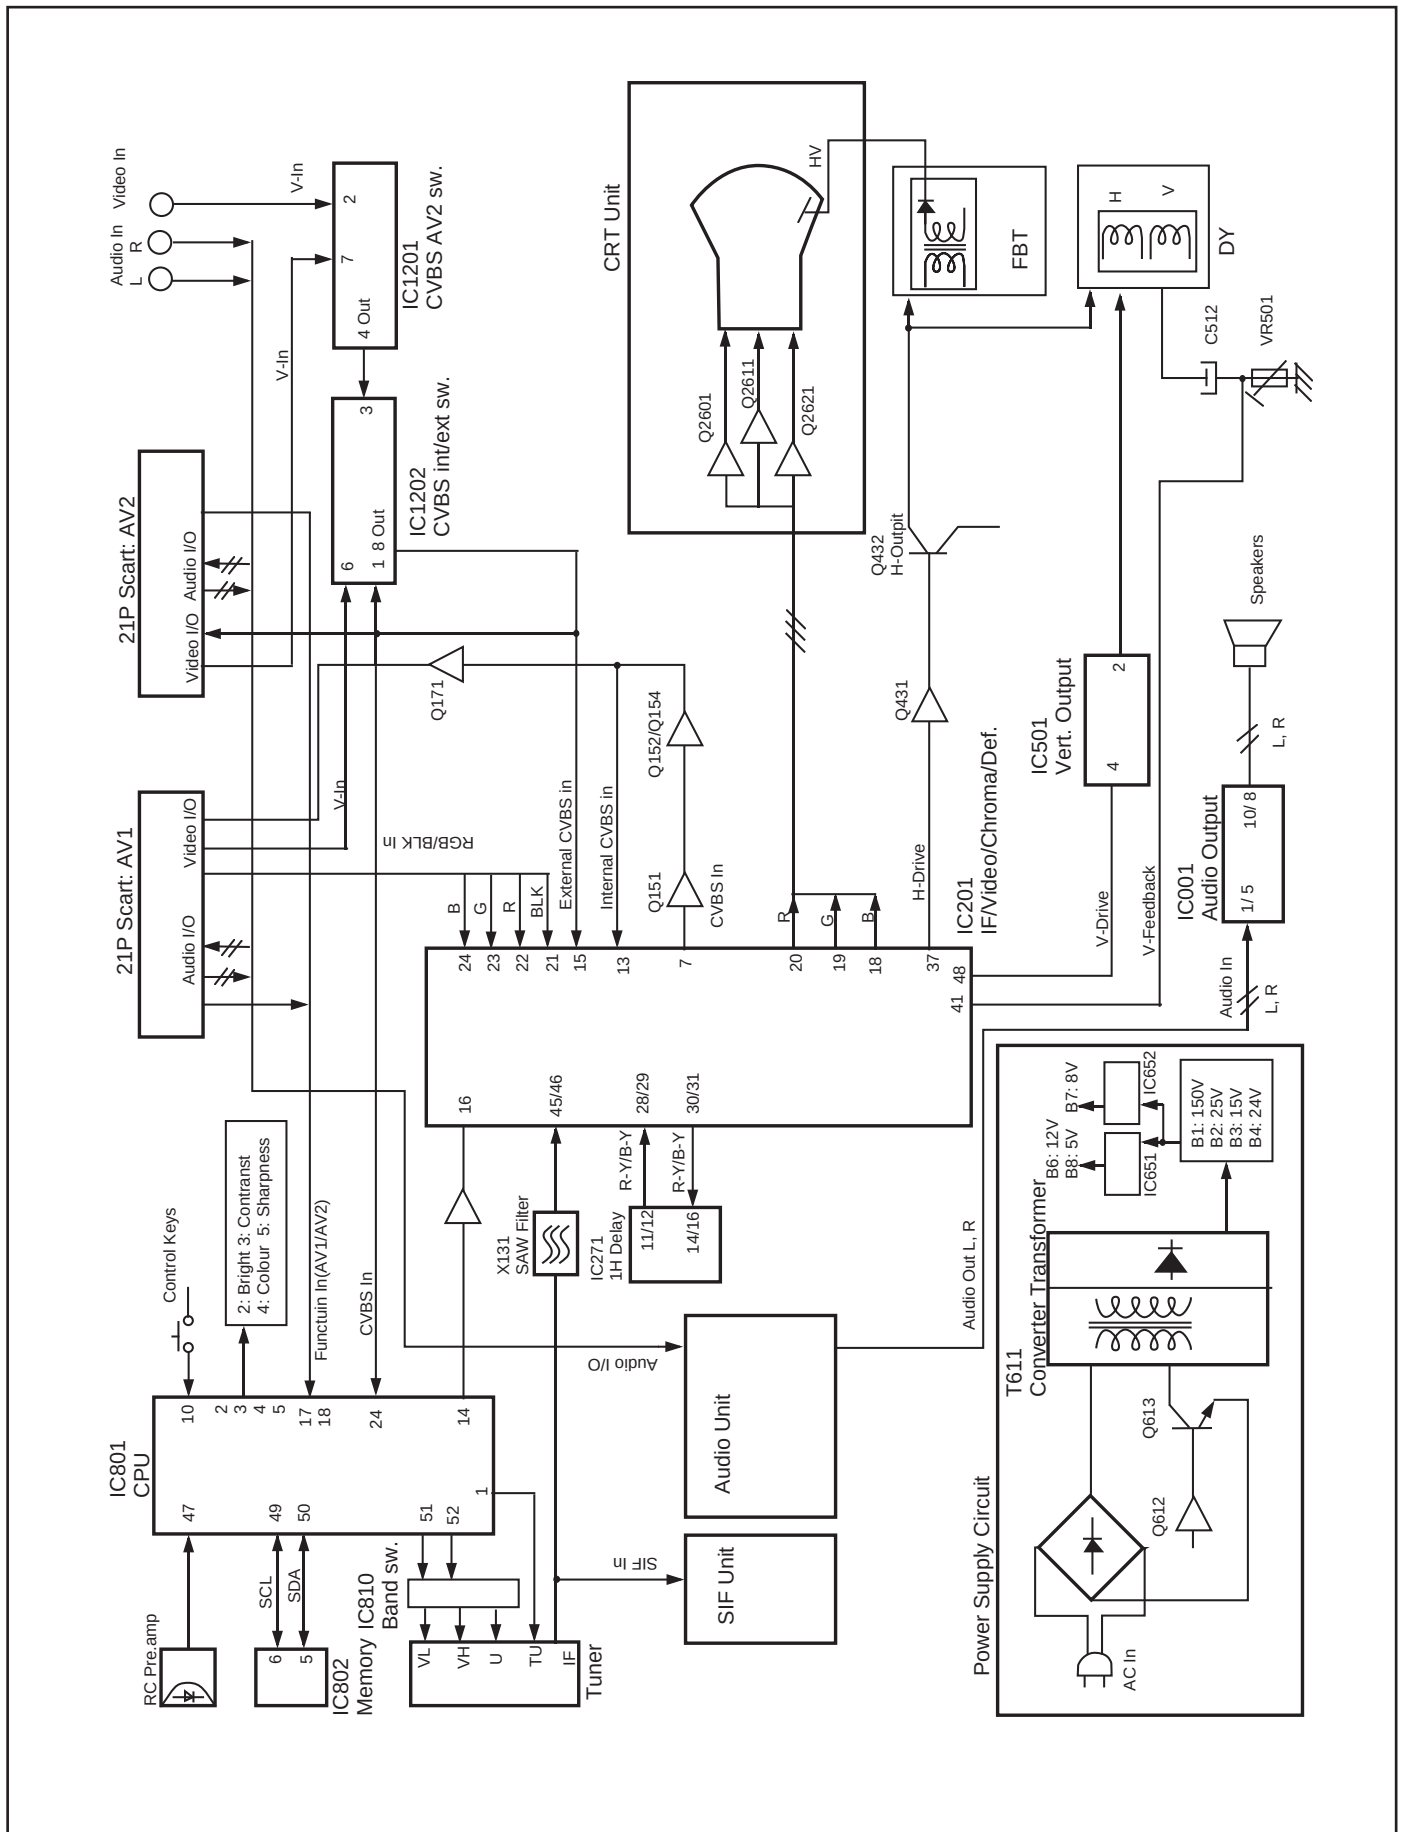

CIRCUIT DESCRIPTION

1. POWER SUPPLY

The power supply circuit of the EB4-A chassis is composed of a rectifier smoothing circuit, an oscillation circuit, a control circuit and an output rectifier circuit. The AC input voltage is full-wave rectified by the rectifier smoothing circuit, and an unstable DC voltage is generated at both terminals of the smoothing capacitor C607. This voltage is input to the oscillation circuit. The oscillation circuit is provided with a blocking oscillator circuit that switches the switching transistor Q613 ON and OFF, and an oscillation frequency and a duty square wave pulse are generated in the input windings according to operation of the control circuit. A square-wave pulse whose size is dependent on the turn ratio of the input and output windings is obtained in the output winding. This is rectified in the output rectifier circuit, and the desired DC voltage is obtained.

2. IF & DEFLECTION (TDA8361)

The IF output signal from the tuner passes through the SAW filter, and it is input to pin45 and pin46 of IC201. The signal input to the IC passes through the IF amplifier, video detection and video amplifier circuits and is output from pin7 as a composite video signal. And after this signal is converted to impedance at Q151, supplies to the video and chroma amplifier stages.

The sync.-separation circuit separates the video signals applied to pin13(internal video signal) or pin15(external video signal) to vertical- and horizontal-sync. signals respectively. The horizontal oscillator requires no external components and is fully integrated. The oscillator is always running when the start-pin36 is supplied with 8V. Horizontal drive signal is output from pin37. VR361 is for adjustment of the horizontal centring. The separated vertical-sync. signal from sync. separation circuit passes through the vertical-separation circuit, and applied to trigger divider circuit. The horizontal oscillation pulse and input vertical sync. pulse are monitored by the trigger divider circuit, and switching 50Hz and 60Hz system, the vertical amplitude automatically adjusted for 50Hz and 60Hz. The output signal from the trigger divider is triggered vertical oscillation circuit consisting of C351, R352 and pin42, and vertical drive pulse is output from pin43. VR501 is for changing the amount of AC feedback applied to pin41 and for adjustment of the vertical amplitude.

3. VIDEO CHROMA & R.G.B. (TDA8361)

The composite video signal output from the pin7 of IC101 passes through Q151-Q154, and it is supplied to pin13. The external video signal output from SCART is supplied to pin15. The video signal input to pin13 or pin15 is separated to luminance (Y) signal and chroma signal in IC201. These pins are used in common with H/V-sync. separation input. The peaking of Y signal is adjusted by DC voltage of pin14. ("SHARPNESS"

control) The chroma signal is divided into R-Y and B-Y chroma signals, demodulated in IC201, and output from pin30 (R-Y) and pin31 (B-Y). These chroma signals pass through the 1H delay line circuit (IC271), and they are input to pin29 (R-Y) and pin28 (B-Y). These R-Y/B-Y signals pass through RGB matrix circuit and RGB selector circuit of IC101. The internal RGB signals are generated in RGB matrix circuit and the RGB selector, consisting linear amplifiers, clamps and selects either the internal RGB signals or the external RGB signals input from pin22(R), pin23(G), pin24(B). Selection is controlled by the voltage at the RGB switch control (pin21) and mixed RGB modes are possible since RGB switching is fast. The RGB switch also functions as a fast blanking pin by blanking the RGB output stages; here internal and external RGB signals are overruled. The colour gain is controlled by DC voltage of pin26. ("COLOUR" control) The contrast control voltage present at pin25, and the brightness control voltage present at pin17 controls DC level of RGB signals. The RGB signals are finally buffered before being available at the RGB output pins [pin20 (R), pin19 (G), pin18 (R)].

4. AUDIO OUTPUT(TDA7263M)

The audio signals output from the audio unit are input to pin1(L) and 5(R) of IC171 and passes through the pre-amplifier circuit and drive circuit, after which it is input to the audio amplifier. The audio amplifier is an SEPP (single-ended, push-pull) OTL type and output to pin8(R) and 10(L) to directly drive the speakers.

5. VERTICAL OUTPUT (LA7832/LA7832)

An IC (LA7832/LA7833) is used for the vertical output circuit in this chassis. The vertical drive pulse from pin43 of IC201 is input to pin4 of IC501. This pulse drives IC501, and vertical scanning is performed. In the first half of scanning a deflecting current is output from pin2 and passes through the following path:

Vcc(B4) → D501 → pin3 → pin2 → DY → C512 → VR501/R509. An electric charge is then stored in C512. In the last half of scanning the current path is C512 → DY → pin2 → pin1 → VR501/R509 → C512. In this way, an amplifying sawtooth waveform current flows directly to DY to perform electron beam deflection. Next, in the first half of the banking period the vertical drive pulse suddenly becomes OFF, and in order to reduce the current flowing to DY, the current path becomes as follows by the inductance of DY:

DY → pin2 → pin1 → VR501/R509 → C512 → DY. Also, when the charge of DY has dissipated, the current path becomes Vcc24V → pin6 → pin7 → C502 → pin3 → pin2 → DY → C512 → VR501/R509, and when the prescribed current value is reached, the vertical drive pulse becomes ON. This completes one cycle.

6. HORIZONTAL OUTPUT

A horizontal oscillation signal is output from pin37 of IC201 and switches the drive transistor Q431. This switching signal is current amplified by the drive transformer T431 and drives the output transistor Q432. When Q432 becomes ON, an amplifying current flows directly to DY through C441 → DY → Q432 → GND, and deflection is performed in the last half of the scanning period. Next, when Q432 becomes OFF, the charge that had been stored in DY up to that point releases a resonance current to the resonant capacitors C421/C423 and charges them. The current stored in C421/C423 is then flowed back to DY, and an opposite charge is then stored in DY. This opposite charge then switches the dumper diode in Q432 ON, the resonance state is completed, and an amplifying current is then flowed again directly to DY through the dumper diode. By this means, deflection in the first half of the scanning period is performed, and when Q432 becomes ON at the end of the first half of the scanning period, deflection during the last half is begun, thus completing one cycle.

In the PCC circuit consisting of Q461 and Q462, the parabola signal supplied from the vertical circuit is added at the horizontal output stage and pincushion compensation is performed by varying the DC voltage bias. Further, the ABL voltage is feedback to the base of Q462 to compensate for width variations due to variations in the beam current.

Pin25: Black

Pin26: IREF

Pin27: Odd/Even output

Pin28: GND

Pin29: -

Pin30: V-deflection stop output

Pin31: RGB REF

Pin32: Blue output for OSD

Pin33: Green output for OSD

Pin34: Red output for OSD

Pin35: Blanking output for OSD

Pin36: H-sync. input (Horizontal pulse for OSD)

Pin37: V-sync. input (Vertical pulse for OSD)

Pin38~39: Supply (+5V)

Pin 40: OSC GND

Pin 41: Oscillator input for CPU

Pin 42: Oscillator output for CPU

Pin 43: Reset input

Pin 44: Supply (+5V)

Pin 45: Protect signal input (L:Power circuit defects)

Pin 46: Ident. signal input

Pin 47: R/C signal input

Pin 48: Mute output in no picture

Pin 49: I²C bus SCL (Serial clock)

Pin 50: I²C bus SDA (Serial date)

Pin 51: Option SW5 & Band select output1

Pin 52: Band select output2

7. CPU <System and Teletext Control>

Pin description

Pin1: Tuning voltage output

Pin2: Brightness control output (6-bit DAC)

Pin3: Contrast control output (6-bit DAC)

Pin4: Colour control output (6-bit DAC)

Pin5: Sharpness control output(6-bit DAC)

Pin6: Not used (GND)

Pin7: Not used (GND)

Pin8: Power ON/OFF output (H:ON)

Pin9: AFT signal input

Pin10: Option SW1 & Keyboard scan input (DC)

Pin11: Option SW2

Pin12: 50/60Hz switch input (50Hz: Hi)

Pin13: GND

Pin14: TV/AV switch output (TV: Hi)

Pin15: S-VHS switch output (S-VHS: Hi)

Pin16: Option SW3 (2AV: Hi)

Pin17: Function signal input for SCART1

Pin18: Function signal input for SCART2

Pin19: Power LED drive output1

Pin20: Option SW4 & Power LED drive output2


Pin21: Ignore output

Pin22: GND

Pin23: CVBS input0 (Internal)

Pin24: CVBS input1 (Internal/External)

SERVICE CONTROL ADJUSTMENT

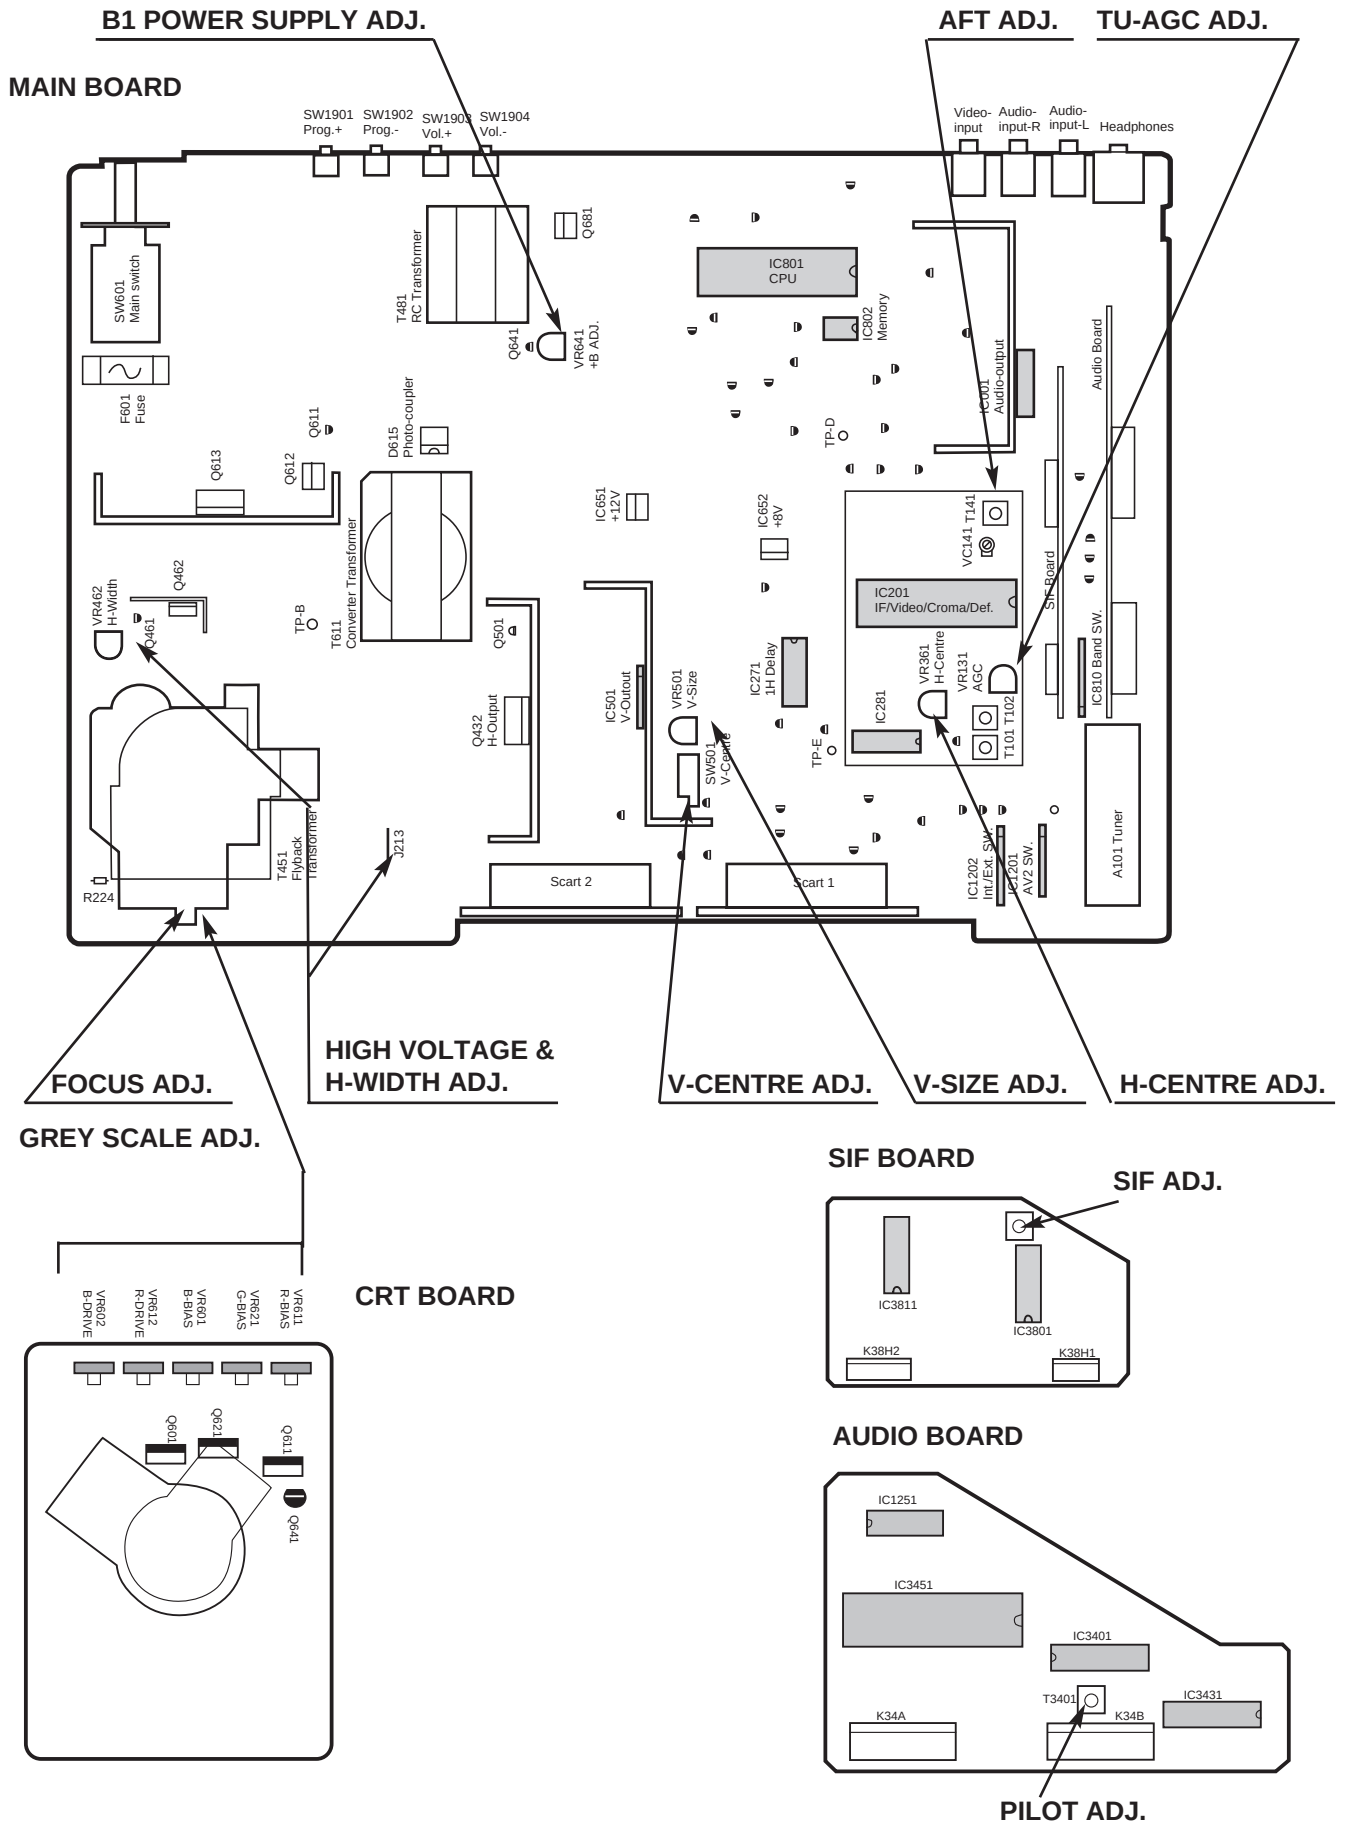

B1 POWER SUPPLY ADJUSTMENT

1. Set VR641 to be mechanically centre before pressing the mains ON/OFF switch.
2. Tune the receiver to a PAL circular pattern.
3. Set the brightness and contrast controls to normal.
4. Connect a digital V-meter to test point "TP-B".
5. Using VR641, adjust the voltage to $150 \pm 0.5V$.

AFT ADJUSTMENT

1. Tune the receiver to the clearest station.
2. Using T141, adjust the AFT to obtain the best picture.

AGC ADJUSTMENT

NOTE: Do not attempt this adjustment with a weak signal.

1. Tune the receiver to the clearest station.
2. Set AGC VR(VR131) in direction which causes snow noise just to appear, then in the opposite direction until the snow noise just disappears.

GREY SCALE ADJUSTMENT

[SCREEN VR ADJUSTMENT]

1. Tune the receiver to the white pattern.
2. Set the brightness and contrast controls to normal.
3. Set VR2602 and VR2612 to their mechanical centres.
4. Turn VR2601, VR2611 and VR2621 fully counter-clockwise (anti-clockwise).
5. Set the TV into service mode by pressing the Function button **F**  on the Remote control and the Prog + **P**  on the TV front panel. Press the Function button **F**  on the Remote control until "SCREEN" is highlighted. This sets up a horizontal scanning line.
6. Set screen VR so that one colour is just visible.

[BIAS VR ADJUSTMENT]

7. By using VR2601, VR2611 or VR2621, adjust the line until it becomes white.
8. Set screen mode OFF, by pressing the Recall button   on the Remote control.

[DRIVE VR ADJUSTMENT]

9. Using VR2602 and VR2612, adjust white balance.

HIGH VOLTAGE & WIDTH ADJUSTMENT

[HIGH VOLTAGE ADJUSTMENT]

1. Tune the receiver to the circular pattern.
2. Set the brightness and contrast controls to **maximum**.
3. Connect a digital V-meter to both terminals of R224, and a high voltage meter to the CRT anode.
4. Confirm high voltage to be 26.0 ± 1 KV at beam current 1.4, and less than 29.0 KV at 0 beam current.

[H-WIDTH ADJUSTMENT]

5. Adjust VR462 to obtain proper H- width .
6. Reconfirm high voltage.

H-CENTRE ADJUSTMENT

1. Tune the receiver to a circular pattern.
2. Adjust H-centre by using VR361.

V-CENTRE ADJUSTMENT

1. Tune the receiver to a circular pattern.
2. Adjust V-centre by using SW501.


V-SIZE ADJUSTMENT

1. Tune the receiver to a circular pattern.
2. Adjust V-size by using VR501.

FOCUS ADJUSTMENT

By using FOCUS VR, adjust focus control for good scanning lines.


CIRCUIT ALIGNMENT

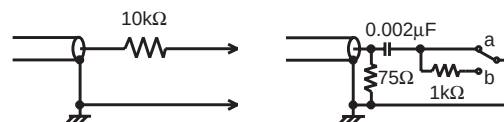


VIF alignment

Input probe


Output probe

SETTING		Adjustment	Waveform
DC 15.5V AGC voltage (4.3-4.5V) Output probe Input probe Marker frequency Sweep ATT 0dB=176mVrms/75	C644 + IC201-pin48 IC201-pin45 (Side b) IC201-pin7 38.9MHz 20dB	By using T141, adjust "P" to be maximum amplitude.	

SIF alignment

SETTING		Adjustment	Waveform
DC 12V AGC voltage Output probe Input probe Sweep ATT Marker Frequency	IC3801-pin11 IC3801-pin3 IC3801-pin1 (Side b) IC3801-pin12 10dB 38.9MHz	1. Adjust AGC voltage to be "A" = 0.5Vp-p. 2. By using T3801, adjust "P" to be equal centre line.	

Pilot alignment

SETTING		Adjustment	Waveform
Oscilloscope Input sound signal source TV system Deviation Mode	IC3401-pin5 System B/G 27kHz Stereo	By using T3401, adjust amplitude to be maximum.	

INITIALISATION (Important Notice)

When you replace a memory IC (IC802), it is necessary to initialise the IC as following step.

A. Initialisation

Press and hold the **normalisation button** →•← on the remote control handset and press the **programme + button** P▲ on the TV set.

The IC will be initialised automatically to set the following data.

User control data

Colour	: Centre
Brightness	: Centre
Contrast	: Maximum
Sharpness	: Centre
Text. Bright	: Centre
Bass	: Centre
Treble	: Centre
Balance	: Centre
Volume	: Step 12

Service data

K1	: +000
K2	: +000
ST ID	: +000
ATT	: +004
MAX	: -096
MIN	: +010

Manual set data

->	+001
->	-001
->	-050
->	-075

The initialised service data of items K1, K2, MAX and MIN should be modified to the manual set data shown above.

For how to modify, refer to next step.

B. Service Mode

1. To entre the service mode, press and hold the **Function button** F[...] on the remote control handset and press the **programme + button** P▲ on the TV set.

The following OSD appears on the screen.

ADJUST	DATA
K1	+000
K2	-006
ST ID	+000
ATT	+004
MAX	-050
MIN	-075
SCREEN	VOL
CPU Ver	1.0

2. Select the desired service item by using the **Function button** F[...] on the remote control handset.
3. Change the data by using the **Level + or - button** -▲+ .
4. To return to TV mode press the **Recall button** [Y] on the remote control handset.

Service mode description

K1, K2 : For adjustment of stereo separation

ST ID : Mode setting for A2 stereo judgement

+000 : Fast mode

+001: Normal mode

+002: Fast -> normal mode

ATT : Attenuation of FM sound

To equalise sound levels between FM and Nicam.

MAX : Setting of sensitivity for switching Nicam to FM mode

MIN : Setting of sensitivity for switching FM to Nicam mode.

SCREEN: For screen adjustment

To make one horizontal scanning line.

NOTE:


The items K1, K2, ST ID and ATT are invalid adjustments for a model which does not have an A2 stereo decoder.

The items MAX and MIN are invalid adjustments for a model which does not have a Nicam decoder.

These items allow modifications to the set data, but there is no effect in performance.

CABINET PARTS LIST FOR MODELS C28ER57N

Note: Parts order must contain Service Ref. No., Part No., and descriptions.

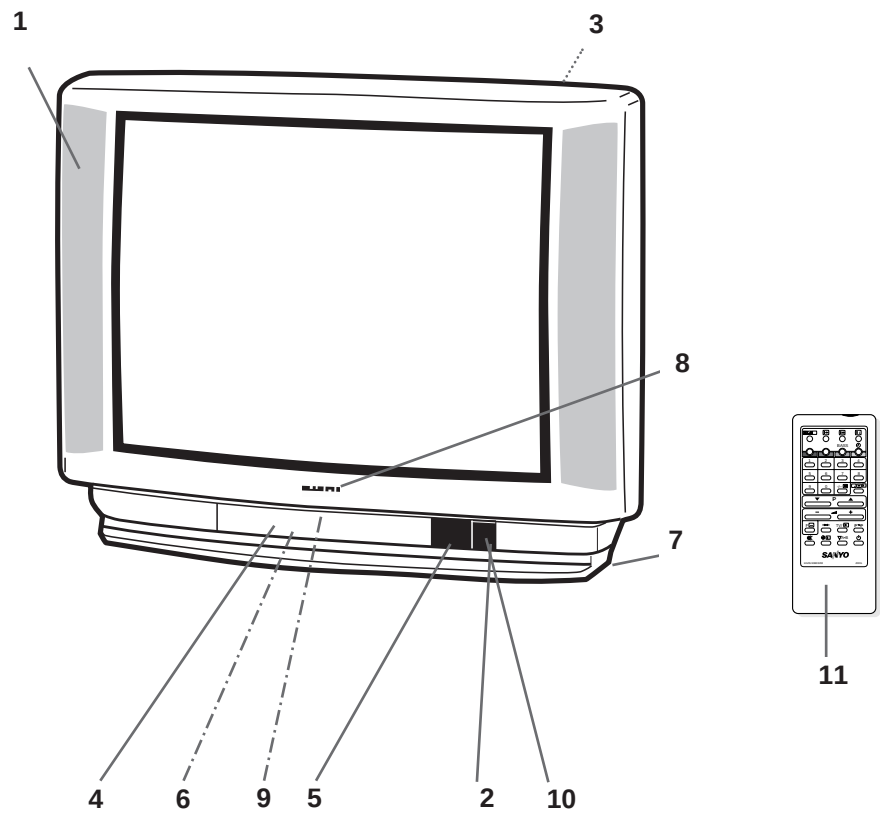

Item	Part No.	Description	
CABINET PARTS			
1	610 264 7556	ASSY, CABINET FR-F3SLV	
2	610 261 6057	BUTTON POWER-F3SCM	
3	610 264 7587	CABINET BACK-F3SLV	
4	610 264 7594	DOOR-F3SLV	
5	610 261 6132	DEC BOARD-F3SCM	
6	610 261 7726	DEC CONTROL SHEET-F3SCM	
7	610 253 2449	HOLDER AC CORD-GBR-D4VA	
8	645 003 9256	BADGE, SANYO*46.2X13.5L45	
9	610 104 2505	LATCH PUSH, 7.9X6.9BK	
10	610 210 7302	COIL SPRING-D8HA	
ACCESSORIES			
11	JXZB 0r JXRG	RC TRANSMITTER	
12	SKP10064	INST MANUAL (GB,D,F,NL,GR)	
	SKP10065	INST MANUAL (DK,SF,FI,P,I)	

CHASSIS ELECTRICAL PARTS LIST

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by a  mark in this parts list and the circuit diagram show components whose value have special significance to product safety. It is particularly recommended that only parts specified on the following parts list be used for components replacement pointed out by the mark.

Note: Parts order must contain Service Ref. No., Part No., and descriptions.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
Read description in the Capacitor and Resistor as follows: CAPACITOR CERAMIC 100P K 50V _____ Rated Voltage Tolerance Symbols: <u>Less than 10PF</u> A: Not specified B: ±0.1PF C: ±0.25PF D: ±0.5PF F: ±1PF G: ±2PF R: ±0.25-0PF S: ±0-0.25PF E: +0-1PF <u>More than 10PF</u> A: Not specified B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% G: ±2% H: ±3% J: ±5% K: ±10% L: ±15% M: ±20% N: ±30% P: +100-0% Q: +30-10% T: +50-10% U: +75-10% V: +20-10% W: +100-10% X: +40-20% Y: +150-10% Z: +80-20% _____ Rated value: P=pico farad, U=Micro farad Material: CERAMIC..... Ceramic MT-PAPER..... Metallized Paper POLYESTER..... Polyester MT-POLYEST.... Metallized Polyester POLYPRO..... Polypropylene MT-POLYPRO.... Metallized Polypropylene COMPO FILM..... Composite film MT-COMPO..... Metallized Composite STYRENE..... Styrene TA-SOLID..... Tantalum Solid AL-SOLID..... Aluminium Solid ELECT..... Electrolytic NP-ELECT..... Non-polarized Electrolytic OS-SOLID..... Aluminium Solid with Organic Semiconductive Electrolytic DL-ELECT..... Doble Layered Electrolytic RESISTOR CARBON 4.7K J A 1/4W _____ Rated Wattage Performance Symbols: A: General B: Non flammable Z: Low noise Other: Temperature coefficient Tolerance Symbols: A: ±0.05% B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% G: ±2% J: ±5% K: ±10% M: ±20% P: +5-15% _____ Rated value, ohms: K: 1,000, M: 1,000,000 Material: CARBON..... Carbon MT-FILM..... Metal Film OXIDE-MT..... Oxide Metal Film SOLID..... Composition MT-GLAZE..... Metal Glaze WIRE WOUND... Wire Wound CERAMIC RES.. Ceramic FUSIBLE RES.... Fusible			Chassis construction C28ER57N-00 (28DN2) ASSY,PWB,MAIN F3SGM 1AA0B10E226C0 (Page 11) ASSY,PWB,SIF F2RV 1AA0B10E230CA (Page 18) ASSY,PWB,AUDIO F2RV 1AA0B10E230CB (Page 19) ASSY,PWB,CRT F2RC 1AA0B10E24500 (Page 20) OUT OF CIRCUIT-F3SGM (Page 20) C28ER57N-01 (28DN2) ASSY,PWB,MAIN F3SGV 1AA0B10H015D0 (Page 18) ASSY,PWB,SIF F2RV 1AA0B10E230CA (Page 18) ASSY,PWB,AUDIO F2RV 1AA0B10E230CB (Page 19) ASSY,PWB,CRT F2RC 1AA0B10E24500 (Page 20) OUT OF CIRCUIT-F3SGV (Page 20) ASSY,PWB,MAIN F3SGM 1AA0B10H015R0 TRANSISTOR Q001 406 007 2106 TR JC546A 406 007 2007 TR JC546B 405 019 1909 TR 2SC536 - E - NP 405 019 2708 TR 2SC536 - F - NP 405 019 3804 TR 2SC536 - G - NP Q1001 406 007 1901 TR JC556A 406 007 1802 TR JC556B 405 004 4205 TR 2SA608 - E - CTV - NP 405 004 4809 TR 2SA608 - F - CTV - NP 405 028 7909 TR 2SA608 - G - CTV - NP Q1002 406 007 2106 TR JC546A 406 007 2007 TR JC546B 405 019 1909 TR 2SC536 - E - NP 405 019 2708 TR 2SC536 - F - NP 405 019 3804 TR 2SC536 - G - NP Q1003 406 007 2106 TR JC546A 406 007 2007 TR JC546B 405 019 1909 TR 2SC536 - E - NP 405 019 2708 TR 2SC536 - F - NP 405 019 3804 TR 2SC536 - G - NP Q1004 406 007 2106 TR JC546A 406 007 2007 TR JC546B 405 019 1909 TR 2SC536 - E - NP 405 019 2708 TR 2SC536 - F - NP 405 019 3804 TR 2SC536 - G - NP Q1005 406 007 2106 TR JC546A 406 007 2007 TR JC546B 405 019 1909 TR 2SC536 - E - NP 405 019 2708 TR 2SC536 - F - NP 405 019 3804 TR 2SC536 - G - NP Q1041 406 007 2106 TR JC546A 406 007 2007 TR JC546B		

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
Q1042	405 019 1909	TR 2SC536-E-NP	Q203	405 019 3804	TR 2SC536-G-NP
	405 019 2708	TR 2SC536-F-NP		406 007 2106	TR JC546A
	405 019 3804	TR 2SC536-G-NP		406 007 2007	TR JC546B
	406 007 1901	TR JC556A		405 019 1909	TR 2SC536-E-NP
Q1043	406 007 1802	TR JC556B	Q431	405 019 2708	TR 2SC536-F-NP
	405 004 4205	TR 2SA608-E-CTV-NP		405 019 3804	TR 2SC536-G-NP
	405 004 4809	TR 2SA608-F-CTV-NP		405 018 0507	TR 2SC3332-R
	405 028 7909	TR 2SA608-G-CTV-NP		405 018 0606	TR 2SC3332-S
Q1201	406 007 2106	TR JC546A	Q432	405 095 0209	TR 2SD1556-3E
	406 007 2007	TR JC546B		405 064 7307	TR 2SB1274-Q-RA
	405 019 1909	TR 2SC536-E-NP		405 064 7406	TR 2SB1274-R-RA
	405 019 2708	TR 2SC536-F-NP		405 064 7505	TR 2SB1274-S-RA
Q1202	405 019 3804	TR 2SC536-G-NP	Q461	405 139 1100	TR 2SB1565-D RA
	406 007 2106	TR JC546A		405 139 1209	TR 2SB1565-E RA
	406 007 2007	TR JC546B		405 139 1308	TR 2SB1565-F RA
	405 019 1909	TR 2SC536-E-NP	Q462	406 007 2106	TR JC546A
Q1203	405 019 2708	TR 2SC536-F-NP		406 007 2007	TR JC546B
	405 019 3804	TR 2SC536-G-NP		405 019 1909	TR 2SC536-E-NP
	406 007 2106	TR JC546A		405 019 2708	TR 2SC536-F-NP
Q1204	406 007 2007	TR JC546B	Q501	405 019 3804	TR 2SC536-G-NP
	405 019 1909	TR 2SC536-E-NP		406 007 2106	TR JC546A
	405 019 2708	TR 2SC536-F-NP		406 007 2007	TR JC546B
	405 019 3804	TR 2SC536-G-NP		405 019 1909	TR 2SC536-E-NP
Q121	406 007 2106	TR JC546A	Q611	405 019 2708	TR 2SC536-F-NP
	406 007 2007	TR JC546B		405 019 3804	TR 2SC536-G-NP
	405 019 1909	TR 2SC536-E-NP		406 007 1901	TR JC556A
	405 019 2708	TR 2SC536-F-NP		406 007 1802	TR JC556B
Q1212	405 019 3804	TR 2SC536-G-NP	Q612	405 004 4205	TR 2SA608-E-CTV-NP
	406 007 2106	TR JC546A		405 004 4809	TR 2SA608-F-CTV-NP
	406 007 2007	TR JC546B		405 028 7909	TR 2SA608-G-CTV-NP
	405 019 1909	TR 2SC536-E-NP	Q613	405 058 0208	TR 2SC3807-R-CTV-YA
Q151	405 019 2708	TR 2SC536-F-NP		405 095 0407	TR 2SC4429-L-YB
	405 019 3804	TR 2SC536-G-NP		405 095 0308	TR 2SC4429-M-YB
	406 007 2106	TR JC546A	Q641	406 007 2106	TR JC546A
Q152	406 007 2007	TR JC546B		406 007 2007	TR JC546B
	405 019 1909	TR 2SC536-E-NP		405 019 1909	TR 2SC536-E-NP
	405 019 2708	TR 2SC536-F-NP		405 019 2708	TR 2SC536-F-NP
Q153	405 019 3804	TR 2SC536-G-NP	Q652	405 019 3804	TR 2SC536-G-NP
	406 007 1901	TR JC556A		405 023 4903	TR 2SD400-D-MP
	406 007 1802	TR JC556B		405 023 5009	TR 2SD400-E-MP
	405 004 4205	TR 2SA608-E-CTV-NP		405 023 5306	TR 2SD400-F-MP
Q154	405 004 4809	TR 2SA608-F-CTV-NP	Q681	405 059 9804	TR 2SD1913-Q-RA
	405 028 7909	TR 2SA608-G-CTV-NP		405 059 9903	TR 2SD1913-R-RA
	406 007 2106	TR JC546A		405 060 0005	TR 2SD1913-S-RA
	406 007 2007	TR JC546B	Q682	406 007 1901	TR JC556A
Q171	405 019 1909	TR 2SC536-E-NP		406 007 1802	TR JC556B
	405 019 2708	TR 2SC536-F-NP		405 004 4205	TR 2SA608-E-CTV-NP
	405 019 3804	TR 2SC536-G-NP		405 004 4809	TR 2SA608-F-CTV-NP
Q2001	406 007 1901	TR JC556A	Q801	405 028 7909	TR 2SA608-G-CTV-NP
	406 007 1802	TR JC556B		405 118 4207	TR PH2369
	405 004 4205	TR 2SA608-E-CTV-NP	Q835	406 007 2106	TR JC546A
	405 004 4809	TR 2SA608-F-CTV-NP		406 007 2007	TR JC546B
Q201	405 028 7909	TR 2SA608-G-CTV-NP		405 019 1909	TR 2SC536-E-NP
	406 007 1901	TR JC556A		405 019 2708	TR 2SC536-F-NP
	406 007 1802	TR JC556B	Q861	405 019 3804	TR 2SC536-G-NP
	405 004 4205	TR 2SA608-E-CTV-NP		406 007 1901	TR JC556A
Q202	405 004 4809	TR 2SA608-F-CTV-NP		406 007 1802	TR JC556B
	405 028 7909	TR 2SA608-G-CTV-NP		405 004 4205	TR 2SA608-E-CTV-NP
	406 007 2106	TR JC546A	Q871	405 004 4809	TR 2SA608-F-CTV-NP
	406 007 2007	TR JC546B		405 028 7909	TR 2SA608-G-CTV-NP
Q203	405 019 1909	TR 2SC536-E-NP		406 007 2106	TR JC546A
	405 019 2708	TR 2SC536-F-NP		406 007 2007	TR JC546B
	405 019 3804	TR 2SC536-G-NP	Q872	405 019 1909	TR 2SC536-E-NP
	406 007 2106	TR JC546A		405 019 2708	TR 2SC536-F-NP
Q204	406 007 2007	TR JC546B		405 019 3804	TR 2SC536-G-NP
	405 019 1909	TR 2SC536-E-NP		406 007 2106	TR JC546A
	405 019 2708	TR 2SC536-F-NP	Q873	406 007 2007	TR JC546B
	405 019 3804	TR 2SC536-G-NP		405 019 1909	TR 2SC536-E-NP
Q205	406 007 2106	TR JC546A		405 019 2708	TR 2SC536-F-NP
	406 007 2007	TR JC546B		405 019 3804	TR 2SC536-G-NP
	405 019 1909	TR 2SC536-E-NP	Q874	406 007 2106	TR JC546A
	405 019 2708	TR 2SC536-F-NP		406 007 2007	TR JC546B

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
Q875	405 019 1909	TR 2SC536-E-NP	C103A	403 069 9500	CERAMIC 0.01U Z 50V
	405 019 2708	TR 2SC536-F-NP	C1031	403 014 9203	CERAMIC 180P J 50V
	405 019 3804	TR 2SC536-G-NP	C104	403 043 9106	ELECT 47U M 16V
	406 007 2106	TR JC546A	C1041	403 041 8804	ELECT 10U M 16V
	406 007 2007	TR JC546B	C106	403 049 0008	ELECT 1U M 50V
	405 019 1909	TR 2SC536-E-NP	C106TM	403 069 8305	CERAMIC 0.01U Z 50V
	405 019 2708	TR 2SC536-F-NP	C1101	403 041 8804	ELECT 10U M 16V
405 019 3804	TR 2SC536-G-NP	C1103	403 069 1702	CERAMIC 1000P K 50V	
INTEGRATED CIRCUIT			C1104	403 041 8804	ELECT 10U M 16V
IC001	409 301 4906	IC TDA7263M	C1105	403 009 5708	CERAMIC 100P J 50V
IC1201	409 018 7603	IC LA7016	C1106	403 069 1702	CERAMIC 1000P K 50V
IC1202	409 120 3401	IC LA7221	C1107	403 041 8804	ELECT 10U M 16V
IC201	409 309 6209	IC TDA8361/N3	C1108	403 014 9203	CERAMIC 180P J 50V
IC271	409 291 0605	IC TDA4661/V2	C1109	403 008 7406	CERAMIC 10P D 50V
IC501	409 322 0505	IC TDA4662/V1	C114	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
	409 192 5709	IC LA7833	C117	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
	409 143 3402	IC AN78M12 LB	C120	403 069 9500	CERAMIC 0.01U Z 50V
	409 365 2900	IC BA178M12T	C1201	403 041 8804	ELECT 10U M 16V
	409 026 9507	IC L78M12-RA	C1202	403 041 8804	ELECT 10U M 16V
	409 269 1207	IC L78M12CV	C1203	403 069 8305	CERAMIC 0.01U Z 50V
	409 366 1803	IC MC78M12CT	C1205	403 609 5718	CERAMIC 100P J 50V
IC652	409 362 7403	IC AN78M08 LB	C121	403 068 0409	CERAMIC 0.1U Z 25V
	409 365 2801	IC BA178M08T	C131	403 070 2606	CERAMIC 0.1U Z 50V
	409 285 5203	IC L78M08-RA		401 037 5004	MT-GLAZE 0.000 ZA 1/10W
	409 269 1108	IC L78M08CV	C132	403 069 1702	CERAMIC 1000P K 50V
	409 366 1704	IC MC78M08CT	C133	403 069 9500	CERAMIC 0.01U Z 50V
	IC801	410 269 6802	C134	403 049 9803	ELECT 2.2U M 50V
	IC802	409 333 3700	C135	403 068 0409	CERAMIC 0.1U Z 25V
IC810	409 019 6209	IC LA7910	403 070 2606	CERAMIC 0.1U Z 50V	
CAPACITOR			C136	403 194 4609	ELECT 470U M 16V
C001A	403 068 0419	CERAMIC 0.1U Z 25V	C137	403 068 0409	CERAMIC 0.1U Z 25V
C002	403 070 9803	CERAMIC 0.015U K 50V	C138	403 070 2606	CERAMIC 0.1U Z 50V
C003A	403 068 0419	CERAMIC 0.1U Z 25V		403 069 9500	CERAMIC 0.01U Z 50V
C004B	403 047 3100	ELECT 47U M 25V	C141	403 028 4409	CERAMIC 56P J 50V
C005	403 046 3507	ELECT 33U M 25V	C142	403 068 0409	CERAMIC 0.1U Z 25V
C006	403 046 3507	ELECT 33U M 25V	C143	403 070 2606	CERAMIC 0.1U Z 50V
C007	403 270 3403	MT-POLYEST 0.22U K 63V		403 027 1201	CERAMIC 5P C 50V
C008	403 237 7901	MT-COMPO 0.22U J 50V	C146	403 010 8517	CERAMIC 12P C 50V
	403 270 3403	MT-POLYEST 0.22U K 63V	C151	403 024 2102	CERAMIC 39P J 50V
C009	403 237 7901	MT-COMPO 0.22U J 50V	C162	403 068 0409	CERAMIC 0.1U Z 25V
	403 270 3403	MT-POLYEST 0.22U K 63V	C171	403 070 2606	CERAMIC 0.1U Z 50V
C010	403 237 7901	MT-COMPO 0.22U J 50V		403 270 2901	MT-POLYEST 0.1U K 63V
	403 270 3403	MT-POLYEST 0.22U K 63V	403 237 8007	MT-COMPO 0.1U J 50V	
C011	403 045 1504	ELECT 1000U M 25V	C1901	403 069 1702	CERAMIC 1000P K 50V
C012	403 045 1504	ELECT 1000U M 25V	C200	403 068 0409	CERAMIC 0.1U Z 25V
C013	403 069 9500	CERAMIC 0.01U Z 50V	C2001	403 070 2606	CERAMIC 0.1U Z 50V
C014	403 069 9500	CERAMIC 0.01U Z 50V		403 068 0409	CERAMIC 0.1U Z 25V
C015	403 047 3100	ELECT 47U M 25V	C2002	403 070 2606	CERAMIC 0.1U Z 50V
C016	403 085 4008	NP-ELECT 10U M 16V		403 068 0409	CERAMIC 0.1U Z 25V
C017	403 085 4008	NP-ELECT 10U M 16V	C2003	403 070 2606	CERAMIC 0.1U Z 50V
C018	403 069 9500	CERAMIC 0.01U Z 50V		403 070 2606	CERAMIC 0.1U Z 50V
C021	403 052 8503	ELECT 1000U M 35V	C201	403 014 3409	CERAMIC 18P J 50V
C023	403 069 9500	CERAMIC 0.01U Z 50V	C202	403 270 2901	MT-POLYEST 0.1U K 63V
C024	403 069 9500	CERAMIC 0.01U Z 50V	C203	403 237 8007	MT-COMPO 0.1U J 50V
C1001	403 069 1702	CERAMIC 1000P K 50V		403 073 9107	CERAMIC 4700P K 50V
C1002	403 041 8804	ELECT 10U M 16V	C204	403 068 0409	CERAMIC 0.1U Z 25V
C1003	403 009 5708	CERAMIC 100P J 50V	C205	403 070 2606	CERAMIC 0.1U Z 50V
C1004	403 130 3109	CERAMIC 0.047U K 50V		403 068 0409	CERAMIC 0.1U Z 25V
C1005	403 069 1702	CERAMIC 1000P K 50V	C206	403 070 2606	CERAMIC 0.1U Z 50V
C1006	403 041 8804	ELECT 10U M 16V		403 068 0409	CERAMIC 0.1U Z 25V
C1007	403 009 5708	CERAMIC 100P J 50V	C207	403 070 2606	CERAMIC 0.1U Z 50V
C1008	403 130 3109	CERAMIC 0.047U K 50V		403 068 0409	CERAMIC 0.1U Z 25V
C1009	403 041 8804	ELECT 10U M 16V	C208	403 070 2606	CERAMIC 0.1U Z 50V
C101	403 194 4609	ELECT 470U M 16V		403 069 1702	CERAMIC 1000P K 50V
C102	403 043 9106	ELECT 47U M 16V	C212	403 049 9803	ELECT 2.2U M 50V
C1021	403 069 1702	CERAMIC 1000P K 50V	C215	403 270 3908	MT-POLYEST 0.47U K 63V
C1022	403 041 8804	ELECT 10U M 16V	C222	403 256 0808	MT-COMPO 0.47U J 50V
C1023	403 009 5708	CERAMIC 100P J 50V		404 045 6605	NP-ELECT 2.2U M 50V
C1024	403 041 9405	ELECT 10U M 16V	C226	403 138 1602	ELECT 1U M 100V
C1025	403 069 1702	CERAMIC 1000P K 50V	C231	403 068 0409	CERAMIC 0.1U Z 25V
C1026	403 041 8804	ELECT 10U M 16V	C232	403 070 2606	CERAMIC 0.1U Z 50V
C1027	403 009 5708	CERAMIC 100P J 50V		403 014 9203	CERAMIC 180P J 50V
C1028	403 041 9405	ELECT 10U M 16V	C233	403 068 0409	CERAMIC 0.1U Z 25V
C1029	403 041 8804	ELECT 10U M 16V	C233	403 070 2606	CERAMIC 0.1U Z 50V

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
C234	403 013 3004	CERAMIC 150P J 50V	△C632	404 044 2806	CERAMIC 470P K 400V
C235	403 008 7406	CERAMIC 10P D 50V		404 071 4606	CERAMIC 470P K 400V
C271	403 069 1702	CERAMIC 1000P K 50V		404 060 6901	CERAMIC 470P M 400V
C272	403 069 1702	CERAMIC 1000P K 50V	C640	403 069 8305	CERAMIC 0.01U Z 50V
C273	403 069 9500	CERAMIC 0.01U Z 50V	C641	403 165 9305	CERAMIC 680P K 1K
C274	403 041 8804	ELECT 10U M 16V		403 262 4401	CERAMIC 680P K 1K
C351	403 270 2901	MT-POLYEST 0.1U K 63V	C642	404 055 9801	ELECT 220U M 200V
	403 237 8007	MT-COMPO 0.1U J 50V	C643	403 148 2002	ELECT 470U M 35V
C352	403 270 3809	MT-POLYEST 0.047U K 63V	C644	403 148 0701	ELECT 2200U M 25V
	403 225 2703	MT-COMPO 0.047U J 50V	C645	403 158 1309	ELECT 2200U M 35V
C353	403 073 9107	CERAMIC 4700P K 50V	C651	403 148 0305	ELECT 470U M 16V
C354	403 049 0008	ELECT 1U M 50V	C652	403 069 9500	CERAMIC 0.01U Z 50V
C361	403 072 5605	CERAMIC 2700P K 50V	C653	403 043 9106	ELECT 47U M 16V
C362	403 069 9500	CERAMIC 0.01U Z 50V	C655	403 126 4400	ELECT 100U M 10V
C363	403 042 2405	ELECT 100U M 16V	C661	403 051 0607	ELECT 4.7U M 50V
△C421	404 046 8806	MT-POLYPRO 6200P J 1.5K	C681	403 190 4702	ELECT 1000U M 25V
C422	403 083 4307	POLYPRO 0.022U J 400V	C682	403 069 9500	CERAMIC 0.01U Z 50V
△C423	404 044 1700	MT-POLYPRO 5400P J 1.5K	C683	403 147 9606	ELECT 1000U M 10V
C424	403 083 3914	POLYPRO 0.018U J 400V	C684	403 050 6600	ELECT 3.3U M 50V
C430	403 075 7101	CERAMIC 1000P K 500V	C802	403 270 2901	MT-POLYEST 0.1U K 63V
C431	403 068 5602	CERAMIC 0.056U Z 25V		403 237 8007	MT-COMPO 0.1U J 50V
C432	403 075 7101	CERAMIC 1000P K 500V	C812	403 049 0008	ELECT 1U M 50V
C433	403 076 3102	CERAMIC 3900P K 500V	C814	403 049 0008	ELECT 1U M 50V
C434	403 229 1207	ELECT 47U M 35V	C816	403 046 9905	ELECT 4.7U M 25V
C437	403 066 6106	MT-POLYEST 0.47U J 250V	C818	403 046 9905	ELECT 4.7U M 25V
C438	403 057 0601	POLYESTER 0.01U K 50V	C841	403 069 9500	CERAMIC 0.01U Z 50V
	403 179 3801	POLYESTER 0.01U K 50V	C861	403 179 1213	POLYESTER 4700P J 50V
C441	403 309 2100	POLYPRO 0.3U J 400V	C871	403 068 0409	CERAMIC 0.1U Z 25V
C445	403 049 4204	ELECT 10U M 50V		403 070 2606	CERAMIC 0.1U Z 50V
C462	403 049 0008	ELECT 1U M 50V	C872	403 043 9106	ELECT 47U M 16V
C463	403 270 2901	MT-POLYEST 0.1U K 63V	C873	403 018 0503	CERAMIC 22P J 50V
	403 237 8007	MT-COMPO 0.1U J 50V	C874	403 018 0503	CERAMIC 22P J 50V
C464	403 270 3700	MT-POLYEST 0.39U K 63V	C875	403 068 0409	CERAMIC 0.1U Z 25V
	403 255 8904	MT-COMPO 0.39U J 50V		403 070 2606	CERAMIC 0.1U Z 50V
C465	403 066 0104	MT-POLYEST 2.2U K 100V	C878	403 073 9107	CERAMIC 4700P K 50V
	403 158 9107	MT-POLYEST 2.2U K 100V	C879	403 068 0409	CERAMIC 0.1U Z 25V
C467	403 040 3701	ELECT 220U M 10V		403 070 2606	CERAMIC 0.1U Z 50V
C468	403 045 5809	ELECT 22U M 25V	C881	403 069 9510	CERAMIC 0.01U Z 50V
C470	403 069 8305	CERAMIC 0.01U Z 50V	C882	403 041 8804	ELECT 10U M 16V
C481	403 076 1405	CERAMIC 2700P K 500V	C883	403 018 0503	CERAMIC 22P J 50V
C482	403 159 7409	MT-POLYEST 0.1U K 250V	C884	403 018 0503	CERAMIC 22P J 50V
C501	403 054 1502	ELECT 470U M 35V	C892	403 069 9510	CERAMIC 0.01U Z 50V
C502	403 053 2104	ELECT 220U M 35V			
C503	403 024 2102	CERAMIC 39P J 50V	RESISTOR		
C504	403 069 9500	CERAMIC 0.01U Z 50V	R001	401 037 5400	MT-GLAZE 1K JA 1/10W
C505	403 075 7101	CERAMIC 1000P K 500V	R002	401 037 9200	MT-GLAZE 1.8K JA 1/10W
C506	403 183 7901	MT-POLYEST 0.1U K 100V	R003	401 037 5400	MT-GLAZE 1K JA 1/10W
	403 256 4806	MT-COMPO 0.1U J 100V	R004	401 037 9200	MT-GLAZE 1.8K JA 1/10W
C511	403 188 0709	MT-POLYEST 0.27U K 100V	R005	401 019 9600	CARBON 47 JA 1/4W
	403 313 7702	MT-COMPO 0.27U J 100V	R006	401 014 4105	CARBON 1.5K JA 1/4W
C512	403 148 0701	ELECT 2200U M 25V	R007	401 019 9600	CARBON 47 JA 1/4W
C513	403 049 4204	ELECT 10U M 50V	R008	401 014 4105	CARBON 1.5K JA 1/4W
C514	403 049 4204	ELECT 10U M 50V	R009	401 010 1504	CARBON 4.7 JA 1/2W
C600	403 076 4000	CERAMIC 4700P K 500V	R010	401 010 1504	CARBON 4.7 JA 1/2W
△C601	404 047 3602	MT-POLYEST 0.1U M 125V	R011	401 007 7601	CARBON 150 JA 1/2W
	404 044 0901	MT-COMPO 0.1U M 250V	R012	401 007 7601	CARBON 150 JA 1/2W
△C602	404 047 3602	MT-POLYEST 0.1U M 125V	R013	401 037 6704	MT-GLAZE 1.2K JA 1/10W
	404 044 0901	MT-COMPO 0.1U M 250V	R014	401 025 7409	CARBON 220 JA 1/6W
C603	403 076 7100	CERAMIC 1000P M 1K	R015	401 037 5400	MT-GLAZE 1K JA 1/10W
C604	403 076 7100	CERAMIC 1000P M 1K	R016	401 038 6505	MT-GLAZE 47K JA 1/10W
C605	403 076 7100	CERAMIC 1000P M 1K	R017	401 037 5608	MT-GLAZE 10K JA 1/10W
C606	403 076 7100	CERAMIC 1000P M 1K	R100	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
C607	404 047 1608	ELECT 270U M 400V	R1001	401 038 7601	MT-GLAZE 560 JA 1/10W
	404 069 6001	ELECT 270U M 400V	R1002	401 038 0701	MT-GLAZE 2.2K JA 1/10W
C613	403 061 8303	POLYESTER 4700P K 50V	R1003	401 038 7601	MT-GLAZE 560 JA 1/10W
	403 179 1104	POLYESTER 4700P K 50V	R1004	401 038 0701	MT-GLAZE 2.2K JA 1/10W
C614	403 270 2901	MT-POLYEST 0.1U K 63V	R1005	401 027 6608	CARBON 75 JA 1/6W
	403 237 8007	MT-COMPO 0.1U J 50V	R1006	401 038 5300	MT-GLAZE 39K JA 1/10W
C615	403 058 2604	POLYESTER 0.015U J 50V	R1007	401 038 3702	MT-GLAZE 33K JA 1/10W
	403 179 3207	POLYESTER 0.015U J 50V	R1008	401 027 6608	CARBON 75 JA 1/6W
C616	403 165 6205	CERAMIC 1000P K 2K	R1009	401 027 6608	CARBON 75 JA 1/6W
	403 232 1102	CERAMIC 1000P K 2K	R101	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
C617	403 059 6205	POLYESTER 0.022U K 50V	R1010	401 027 6608	CARBON 75 JA 1/6W
	403 179 2408	POLYESTER 0.022U K 50V	R1011	401 037 5202	MT-GLAZE 100 JA 1/10W
△C631	404 060 6505	CERAMIC 2200P M 400V	R1012	401 027 6608	CARBON 75 JA 1/6W
	404 071 4200	CERAMIC 2200P M 400V	R1013	401 024 6700	CARBON 100 JA 1/6W
	404 060 6604	CERAMIC 2200P M 400V	R1014	401 027 6608	CARBON 75 JA 1/6W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R1015	401 038 6406	MT-GLAZE 4.7K JA 1/10W	R1906	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
R1016	401 019 1000	CARBON 390 JA 1/4W	R1907	401 037 5608	MT-GLAZE 10K JA 1/10W
R1017	401 024 7400	CARBON 10K JA 1/6W	R1908	401 038 3504	MT-GLAZE 330 JA 1/10W
R1018	401 038 3504	MT-GLAZE 330 JA 1/10W	R1909	401 037 7909	MT-GLAZE 1.5K JA 1/10W
R1021	401 038 7601	MT-GLAZE 560 JA 1/10W	R1911	401 038 6307	MT-GLAZE 470 JA 1/10W
R1022	401 038 0701	MT-GLAZE 2.2K JA 1/10W	R1921	401 037 6615	MT-GLAZE 120 JA 1/10W
R1023	401 038 7601	MT-GLAZE 560 JA 1/10W	R1922	401 038 5013	MT-GLAZE 390 JA 1/10W
R1024	401 038 0701	MT-GLAZE 2.2K JA 1/10W	R1924	401 027 5502	CARBON 6.8K JA 1/6W
R1025	401 038 5300	MT-GLAZE 39K JA 1/10W	R2001	401 038 2200	MT-GLAZE 27K JA 1/10W
R1026	401 038 3702	MT-GLAZE 33K JA 1/10W	R2002	401 037 5608	MT-GLAZE 10K JA 1/10W
R1027	401 027 6608	CARBON 75 JA 1/6W	R2004	401 037 7800	MT-GLAZE 150 JA 1/10W
R1028	401 027 6608	CARBON 75 JA 1/6W	R2005	401 026 7002	CARBON 3.9K JA 1/6W
R1029	401 025 1308	CARBON 150 JA 1/6W	R201	401 038 6505	MT-GLAZE 47K JA 1/10W
R1031	401 038 7601	MT-GLAZE 560 JA 1/10W	R202	401 037 5707	MT-GLAZE 100K JA 1/10W
R1032	401 038 7601	MT-GLAZE 560 JA 1/10W	R203	401 024 6720	CARBON 100 JA 1/6W
R1033	401 038 7601	MT-GLAZE 560 JA 1/10W	R204	401 024 6720	CARBON 100 JA 1/6W
R1041	401 038 2200	MT-GLAZE 27K JA 1/10W	R205	401 024 6720	CARBON 100 JA 1/6W
R1042	401 037 5608	MT-GLAZE 10K JA 1/10W	R206	401 037 5202	MT-GLAZE 100 JA 1/10W
R1043	401 039 0304	MT-GLAZE 820 JA 1/10W	R207	401 037 5202	MT-GLAZE 100 JA 1/10W
R1044	401 039 0304	MT-GLAZE 820 JA 1/10W	R208	401 037 5202	MT-GLAZE 100 JA 1/10W
R1045	401 037 5400	MT-GLAZE 1K JA 1/10W	R211	401 038 0800	MT-GLAZE 22K JA 1/10W
R1046	401 038 0701	MT-GLAZE 2.2K JA 1/10W	R212	401 027 5502	CARBON 6.8K JA 1/6W
R1047	401 037 6704	MT-GLAZE 1.2K JA 1/10W	R213	401 037 8005	MT-GLAZE 15K JA 1/10W
R1051	401 037 8104	MT-GLAZE 150K JA 1/10W	R214	401 037 5202	MT-GLAZE 100 JA 1/10W
R1052	401 037 5707	MT-GLAZE 100K JA 1/10W	R215	401 038 3702	MT-GLAZE 33K JA 1/10W
R1053	401 037 6704	MT-GLAZE 1.2K JA 1/10W	R216	401 025 8208	CARBON 22K JA 1/6W
R1054	401 037 8104	MT-GLAZE 150K JA 1/10W	R217	401 025 8208	CARBON 22K JA 1/6W
R1055	401 037 5707	MT-GLAZE 100K JA 1/10W	R218	401 038 7809	MT-GLAZE 56K JA 1/10W
R1056	401 037 6704	MT-GLAZE 1.2K JA 1/10W	R223	401 014 0305	CARBON 130K JA 1/4W
R108	401 037 5004	MT-GLAZE 0.000 ZA 1/10W	R224	401 024 7004	CARBON 1K JA 1/6W
R1101	401 027 6608	CARBON 75 JA 1/6W	R226	401 026 7408	CARBON 39K JA 1/6W
R1102	401 037 7800	MT-GLAZE 150 JA 1/10W	R227	401 024 7400	CARBON 10K JA 1/6W
R1103	401 038 0701	MT-GLAZE 2.2K JA 1/10W	R231	401 037 7800	MT-GLAZE 150 JA 1/10W
R1104	401 038 0701	MT-GLAZE 2.2K JA 1/10W	R232	401 037 7800	MT-GLAZE 150 JA 1/10W
R1105	401 037 5707	MT-GLAZE 100K JA 1/10W	R271	401 024 6700	CARBON 100 JA 1/6W
R1106	401 037 5707	MT-GLAZE 100K JA 1/10W	R272	401 024 9008	CARBON 120 JA 1/6W
R1111	401 037 5608	MT-GLAZE 10K JA 1/10W	R351	401 024 6700	CARBON 100 JA 1/6W
R1200	401 022 1905	CARBON 680 JA 1/4W	R352	401 024 8001	CARBON 1M JA 1/6W
R1201	401 038 6505	MT-GLAZE 47K JA 1/10W	R353	401 038 0909	MT-GLAZE 220K JA 1/10W
R1202	401 038 6505	MT-GLAZE 47K JA 1/10W	R354	401 024 7400	CARBON 10K JA 1/6W
R1203	401 037 5608	MT-GLAZE 10K JA 1/10W	R355	401 012 9904	CARBON 10M JA 1/4W
R1204	401 038 2200	MT-GLAZE 27K JA 1/10W	R356	401 037 5202	MT-GLAZE 100 JA 1/10W
R1205	401 038 2200	MT-GLAZE 27K JA 1/10W	R357	401 037 8005	MT-GLAZE 15K JA 1/10W
R1206	401 038 6505	MT-GLAZE 47K JA 1/10W	R361	401 038 5409	MT-GLAZE 390K JA 1/10W
R1207	401 024 7400	CARBON 10K JA 1/6W	R363	401 038 0800	MT-GLAZE 22K JA 1/10W
R1208	401 038 0800	MT-GLAZE 22K JA 1/10W	R364	401 037 5202	MT-GLAZE 100 JA 1/10W
R1209	401 024 7400	CARBON 10K JA 1/6W	R365	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R121	401 027 0309	CARBON 47K JA 1/6W	R431	401 038 3504	MT-GLAZE 330 JA 1/10W
R133	401 037 9101	MT-GLAZE 180 JA 1/10W	R432	401 037 5400	MT-GLAZE 1K JA 1/10W
R134	401 038 9209	MT-GLAZE 6.8K JA 1/10W	R433	401 007 1104	CARBON 1K JA 1/2W
R135	401 038 6505	MT-GLAZE 47K JA 1/10W	R434	401 067 9201	OXIDE-MT 390 JA 2W
R137	401 037 5202	MT-GLAZE 100 JA 1/10W	R435	402 075 2307	WIRE WOUND 10 JA 5W
R138	401 038 7700	MT-GLAZE 5.6K JA 1/10W	R436	401 012 7009	CARBON 10K JA 1/4W
R141	401 038 9209	MT-GLAZE 6.8K JA 1/10W	R441	401 058 3706	OXIDE-MT 1K JA 1W
R150	401 024 7004	CARBON 1K JA 1/6W	R447	401 026 9907	CARBON 4.7K JA 1/6W
R151	401 022 1905	CARBON 680 JA 1/4W	R448	401 009 5803	CARBON 330 JA 1/2W
R152	401 025 3807	CARBON 180 JA 1/6W	R451	401 061 0808	OXIDE-MT 3.9 JA 1W
R153	401 037 5400	MT-GLAZE 1K JA 1/10W	R462	401 025 1605	CARBON 1.5K JA 1/6W
R154	401 038 2101	MT-GLAZE 2.7K JA 1/10W	R463	401 025 1625	CARBON 1.5K JA 1/6W
R155	401 037 5400	MT-GLAZE 1K JA 1/10W	R467	401 025 8703	CARBON 220K JA 1/6W
R156	401 037 5400	MT-GLAZE 1K JA 1/10W	R468	401 025 4200	CARBON 1.8K JA 1/6W
R157	401 039 0908	MT-GLAZE 910 JA 1/10W	R469	401 027 5908	CARBON 68K JA 1/6W
R158	401 037 5400	MT-GLAZE 1K JA 1/10W	R470	401 027 0309	CARBON 47K JA 1/6W
R159	401 022 1905	CARBON 680 JA 1/4W	R471	401 025 1605	CARBON 1.5K JA 1/6W
R163	401 038 6505	MT-GLAZE 47K JA 1/10W	R472	401 027 0309	CARBON 47K JA 1/6W
R171	401 038 6307	MT-GLAZE 470 JA 1/10W	R473	401 027 5205	CARBON 680 JA 1/6W
R172	401 025 7409	CARBON 220 JA 1/6W	R474	401 009 0907	CARBON 270 JA 1/2W
R173	401 025 7409	CARBON 220 JA 1/6W	R481	401 025 4903	CARBON 180K JA 1/6W
R1900	401 038 7809	MT-GLAZE 56K JA 1/10W	R482	401 027 2600	CARBON 5.6K JA 1/6W
R1901	401 037 8005	MT-GLAZE 15K JA 1/10W	R501	401 026 9907	CARBON 4.7K JA 1/6W
R1901A	401 037 5004	MT-GLAZE 0.000 ZA 1/10W	R502	402 051 8705	FUSIBLE RES 4.7 J- 1/2W
R1902	401 039 0403	MT-GLAZE 8.2K JA 1/10W	R504	401 027 3003	CARBON 56K JA 1/6W
R1902A	401 037 5004	MT-GLAZE 0.000 ZA 1/10W	R505	401 027 5522	CARBON 6.8K JA 1/6W
R1903	401 038 6406	MT-GLAZE 4.7K JA 1/10W	R506	401 017 1844	CARBON 2.7K JA 1/4W
R1903A	401 037 5004	MT-GLAZE 0.000 ZA 1/10W	R507	401 025 3827	CARBON 180 JA 1/6W
R1904	401 038 2101	MT-GLAZE 2.7K JA 1/10W	R508	401 025 7825	CARBON 2.2K JA 1/6W
R1905	401 038 0701	MT-GLAZE 2.2K JA 1/10W	R509	401 057 6807	OXIDE-MT 0.68 JA 1W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R511	401 059 2807	OXIDE-MT 150 JA 1W	R864	401 039 0314	MT-GLAZE 820 JA 1/10W
R512	401 010 7625	CARBON 560 JA 1/2W	R865	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R513	401 063 1001	OXIDE-MT 680 JA 1W	R866	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R602	402 072 4403	WIRE WOUND 3.9 KA 7W	R867	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R611	401 027 2600	CARBON 5.6K JA 1/6W	R868	401 037 6704	MT-GLAZE 1.2K JA 1/10W
R615	401 025 8208	CARBON 22K JA 1/6W	R869	401 038 2200	MT-GLAZE 27K JA 1/10W
R617	401 024 7004	CARBON 1K JA 1/6W	R870	401 025 8208	CARBON 22K JA 1/6W
R619	401 016 1508	CARBON 22 JA 1/4W	R871	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R620	401 007 5805	CARBON 120K JA 1/2W	R872	401 038 3702	MT-GLAZE 33K JA 1/10W
R621	401 007 5805	CARBON 120K JA 1/2W	R873	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R622	401 014 5201	CARBON 15K JA 1/4W	R874	401 037 5608	MT-GLAZE 10K JA 1/10W
R623	401 025 4200	CARBON 1.8K JA 1/6W	R875	401 038 7700	MT-GLAZE 5.6K JA 1/10W
R624	401 068 6902	OXIDE-MT 56 JA 2W	R876	401 037 5608	MT-GLAZE 10K JA 1/10W
R625	401 065 9609	OXIDE-MT 18 JA 2W	R877	401 039 0403	MT-GLAZE 8.2K JA 1/10W
R626	401 016 3304	CARBON 2.2K GA 1/4W	R878	401 037 7909	MT-GLAZE 1.5K JA 1/10W
△R631	402 000 8305	SOLID 5.6M KA 1/2W	R879	401 037 5608	MT-GLAZE 10K JA 1/10W
△R632	402 000 8305	SOLID 5.6M KA 1/2W	R880	401 038 6505	MT-GLAZE 47K JA 1/10W
R641	401 014 6109	CARBON 150K JA 1/4W	R884	401 037 7800	MT-GLAZE 150 JA 1/10W
R642	401 027 4307	CARBON 6.2K JA 1/6W	R885	401 038 5102	MT-GLAZE 3.9K JA 1/10W
R643	401 015 4708	CARBON 180K JA 1/4W	R886	401 037 7800	MT-GLAZE 150 JA 1/10W
R644	401 011 2708	CARBON 68K JA 1/2W	R887	401 038 5102	MT-GLAZE 3.9K JA 1/10W
R645	401 025 8208	CARBON 22K JA 1/6W	R888	401 037 5202	MT-GLAZE 100 JA 1/10W
R646	402 069 9800	WIRE WOUND 2.7 KA 5W	R889	401 037 5202	MT-GLAZE 100 JA 1/10W
R647	402 076 WIRE WOUND	8.2 KA 7W	R891	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R648	401 024 7400	CARBON 10K JA 1/6W	R892	401 038 6406	MT-GLAZE 4.7K JA 1/10W
R651	401 064 3806	OXIDE-MT 1 JA 2W	R893	401 037 5400	MT-GLAZE 1K JA 1/10W
R652	401 069 5607	OXIDE-MT 8.2 JA 2W	R894	401 037 5400	MT-GLAZE 1K JA 1/10W
R653	401 067 8204	OXIDE-MT 39 JA 2W	R895	401 037 6704	MT-GLAZE 1.2K JA 1/10W
R655	401 065 5809	OXIDE-MT 15 JA 2W	R896	401 038 6505	MT-GLAZE 47K JA 1/10W
R656	401 026 9600	CARBON 470 JA 1/6W	R897	401 012 5748	CARBON 1K JA 1/4W
R657	401 007 6901	CARBON 15 JA 1/2W	R898	401 012 5748	CARBON 1K JA 1/4W
R661	401 068 4700	OXIDE-MT 4.7K JA 2W			
R662	401 068 8807	OXIDE-MT 5.6K JA 2W			
R681	401 008 1608	CARBON 1.8K JA 1/2W			
R682	401 069 1708	OXIDE-MT 68 JA 2W			
R684	401 027 8602	CARBON 8.2K JA 1/6W			
R685	401 025 8208	CARBON 22K JA 1/6W			
R800	401 026 9907	CARBON 4.7K JA 1/6W			
R801	401 037 5004	MT-GLAZE 0.000 ZA 1/10W			
R802	401 038 0701	MT-GLAZE 2.2K JA 1/10W			
R803	401 037 9408	MT-GLAZE 180K JA 1/10W			
R804	401 024 7400	CARBON 10K JA 1/6W			
R806	401 024 7400	CARBON 10K JA 1/6W			
R807	401 024 7400	CARBON 10K JA 1/6W			
R808	401 019 1901	CARBON 3.9K JA 1/4W			
R811	401 025 7805	CARBON 2.2K JA 1/6W			
R812	401 038 5102	MT-GLAZE 3.9K JA 1/10W			
R813	401 026 4605	CARBON 33K JA 1/6W			
R815	401 024 6700	CARBON 100 JA 1/6W			
R816	401 037 5608	MT-GLAZE 10K JA 1/10W			
R817	401 027 8602	CARBON 8.2K JA 1/6W			
R818	401 038 9308	MT-GLAZE 68K JA 1/10W			
R819	401 025 7805	CARBON 2.2K JA 1/6W			
R820	401 037 5608	MT-GLAZE 10K JA 1/10W			
R821	401 038 0800	MT-GLAZE 22K JA 1/10W			
R822	401 038 6505	MT-GLAZE 47K JA 1/10W			
R823	401 024 9305	CARBON 1.2K JA 1/6W			
R824	401 038 0701	MT-GLAZE 2.2K JA 1/10W			
R825	401 038 3603	MT-GLAZE 3.3K JA 1/10W			
R838	401 037 8005	MT-GLAZE 15K JA 1/10W			
R839	401 026 4605	CARBON 33K JA 1/6W			
R840	401 026 9600	CARBON 470 JA 1/6W			
R841	401 038 0800	MT-GLAZE 22K JA 1/10W			
R842	401 026 9907	CARBON 4.7K JA 1/6W			
R843	401 037 5608	MT-GLAZE 10K JA 1/10W			
R844	401 038 5112	MT-GLAZE 3.9K JA 1/10W			
R845	401 037 5608	MT-GLAZE 10K JA 1/10W			
R846	401 038 6406	MT-GLAZE 4.7K JA 1/10W			
R847	401 037 5608	MT-GLAZE 10K JA 1/10W			
R848	401 038 6406	MT-GLAZE 4.7K JA 1/10W			
R851	401 037 5400	MT-GLAZE 1K JA 1/10W			
R852	401 037 5400	MT-GLAZE 1K JA 1/10W			
R853	401 038 0800	MT-GLAZE 22K JA 1/10W			
R861	401 038 2101	MT-GLAZE 2.7K JA 1/10W			
R862	401 038 0800	MT-GLAZE 22K JA 1/10W			
R863	401 038 0800	MT-GLAZE 22K JA 1/10W			

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
L152	645 003 9782	INDUCTOR, 22U K		407 163 8209	ZENER DIODE UZ-5.1BCC
L201	645 001 4567	INDUCTOR, 10U K	D352	407 057 8308	ZENER DIODE RD8.2EB2
L202	645 001 4567	INDUCTOR, 10U K		407 164 5207	ZENER DIODE UZ-8.2BCB
L203	645 001 4567	INDUCTOR, 10U K	D361	407 063 8309	ZENER DIODE MTZJ11C
L231	645 008 2863	INDUCTOR, 4.7U K		407 158 3400	ZENER DIODE UZ-11BSC
L232	645 008 2863	INDUCTOR, 4.7U K	D431	407 053 8708	ZENER DIODE MTZ9.1A
L431	645 008 5628	INDUCTOR, 1U M		407 053 8807	ZENER DIODE MTZ9.1B
L432	645 002 1787	CORE, PIPE		407 057 9602	ZENER DIODE RD9.1EB1
L441	610 000 0964	LINEARITY COIL		407 057 9701	ZENER DIODE RD9.1EB2
	610 212 6310	LINEARITY COIL		407 163 9909	ZENER DIODE UZ-9.1BCA
	610 218 3856	LINEARITY COIL		407 162 2703	ZENER DIODE UZ-9.1BCB
L461	610 031 1367	INDUCTOR 202J	D432	407 005 7308	DIODE EM01Z
	610 211 3488	INDUCTOR	D438	407 095 8001	DIODE ERD07-15L
	645 005 5645	INDUCTOR, 2200U K	D439	407 006 4108	DIODE ERB44-04
	645 007 8361	INDUCTOR, 2000U	D442	407 005 4505	DIODE DS442X
L462	645 000 2229	INDUCTOR, 430UH		407 013 1008	DIODE 1S1553
L501	645 008 5642	INDUCTOR, 3.3U K		407 013 4306	DIODE 1S2076A
△L601	645 017 1260	LINE FILTER		407 013 6508	DIODE 1S2471
L607	610 237 1000	PIPE CORE	D445	407 012 4406	DIODE 1SS133
L608	610 237 1000	PIPE CORE		407 012 5809	DIODE 1SS176
L641	645 002 1787	CORE, PIPE	D446	407 151 9003	ZENER DIODE UZ-7.5BCC
L642	645 002 1787	CORE, PIPE		407 151 9102	ZENER DIODE UZ-8.2BCA
L643	645 002 1787	CORE, PIPE	D464	407 053 6605	ZENER DIODE MTZ5.6A
L871	645 008 0203	INDUCTOR, 5.6U K		407 056 9801	ZENER DIODE RD5.6EB1
L881	645 001 4697	INDUCTOR, 1.5U M		407 163 9602	ZENER DIODE UZ-5.6BCA
DIODE			D465	407 012 4406	DIODE 1SS133
D1005	407 063 8309	ZENER DIODE MTZJ11C		407 012 5809	DIODE 1SS176
	407 158 3400	ZENER DIODE UZ-11BSC	D466	407 077 9705	ZENER DIODE MTZ20A
D1007	407 063 8309	ZENER DIODE MTZJ11C		407 055 1707	ZENER DIODE RD20EB1
	407 158 3400	ZENER DIODE UZ-11BSC		407 164 7805	ZENER DIODE UZ-20BCA
D1008	407 063 8309	ZENER DIODE MTZJ11C	D469	407 007 7405	DIODE EU1
	407 158 3400	ZENER DIODE UZ-11BSC	D481	407 007 7405	DIODE EU1
D1010	407 063 8309	ZENER DIODE MTZJ11C	D482	407 012 4406	DIODE 1SS133
	407 158 3400	ZENER DIODE UZ-11BSC		407 012 5809	DIODE 1SS176
D1011	407 063 8309	ZENER DIODE MTZJ11C	D501	407 005 7308	DIODE EM01Z
	407 158 3400	ZENER DIODE UZ-11BSC		408 009 9008	DIODE BYD33D
D1021	407 063 8309	ZENER DIODE MTZJ11C	D502	407 118 2207	ZENER DIODE 1Z75
	407 158 3400	ZENER DIODE UZ-11BSC	D603	407 006 6300	DIODE ERC05-10B
D1022	407 063 8309	ZENER DIODE MTZJ11C		407 009 6901	DIODE RM11C
	407 158 3400	ZENER DIODE UZ-11BSC	D604	407 006 6300	DIODE ERC05-10B
D1023	407 063 8309	ZENER DIODE MTZJ11C		407 009 6901	DIODE RM11C
	407 158 3400	ZENER DIODE UZ-11BSC	D605	407 006 6300	DIODE ERC05-10B
D1024	407 063 8309	ZENER DIODE MTZJ11C		407 009 6901	DIODE RM11C
	407 158 3400	ZENER DIODE UZ-11BSC	D606	407 006 6300	DIODE ERC05-10B
D1026	407 063 8309	ZENER DIODE MTZJ11C		407 009 6901	DIODE RM11C
	407 158 3400	ZENER DIODE UZ-11BSC	D614	407 005 4505	DIODE DS442X
D1027	407 063 8309	ZENER DIODE MTZJ11C		407 013 1008	DIODE 1S1553
	407 158 3400	ZENER DIODE UZ-11BSC		407 013 4306	DIODE 1S2076A
D1101	407 063 8309	ZENER DIODE MTZJ11C	△D615	407 013 6508	DIODE 1S2471
	407 158 3400	ZENER DIODE UZ-11BSC		407 105 8700	PHOTO COUPLE PC113B
D1201	407 053 6803	ZENER DIODE MTZ5.6C		408 009 8407	PHOTO COUPLE CNY17F-30PT6
	407 057 0104	ZENER DIODE RD5.6EB3	D616	407 005 4505	DIODE DS442X
	407 151 8501	ZENER DIODE UZ-5.6BCC		407 013 1008	DIODE 1S1553
D135	407 063 8309	ZENER DIODE MTZJ11C		407 013 4306	DIODE 1S2076A
	407 158 3400	ZENER DIODE UZ-11BSC		407 013 6508	DIODE 1S2471
D1901A	407 120 9706	LED LN28RPL	D617	407 007 6606	DIODE ES1
D1902	407 063 8309	ZENER DIODE MTZJ11C		407 007 6903	DIODE ES1Z
	407 158 3400	ZENER DIODE UZ-11BSC		408 009 9008	DIODE BYD33D
D1903	407 063 8309	ZENER DIODE MTZJ11C	D618	407 005 4505	DIODE DS442X
D1905	407 012 4406	DIODE 1SS133		407 013 1008	DIODE 1S1553
D201	407 063 8309	ZENER DIODE MTZJ11C		407 013 4306	DIODE 1S2076A
	407 158 3400	ZENER DIODE UZ-11BSC		407 013 6508	DIODE 1S2471
D202	407 063 8309	ZENER DIODE MTZJ11C	D619	407 053 3000	ZENER DIODE MTZ11C
	407 158 3400	ZENER DIODE UZ-11BSC		407 054 1807	ZENER DIODE RD11EB3
D203	407 063 8309	ZENER DIODE MTZJ11C	D641	407 009 8806	DIODE RU3AM
	407 158 3400	ZENER DIODE UZ-11BSC	D642	407 007 7603	DIODE EU2
D210	407 012 4406	DIODE 1SS133		407 007 7801	DIODE EU2Z
	407 012 5809	DIODE 1SS176	D643	407 166 2303	DIODE ERC91-02L
D221	407 012 4406	DIODE 1SS133	D644	407 166 2303	DIODE ERC91-02L
	407 012 5809	DIODE 1SS176	D645	407 053 7206	ZENER DIODE MTZ6.2C
D222	407 005 4505	DIODE DS442X		407 053 7503	ZENER DIODE MTZ6.8A
	407 013 1008	DIODE 1S1553		407 057 2801	ZENER DIODE RD6.2EB3
	407 013 4306	DIODE 1S2076A		407 057 4003	ZENER DIODE RD6.8EB1
	407 013 6508	DIODE 1S2471		407 151 8600	ZENER DIODE UZ-6.2BCC
D271	407 053 6407	ZENER DIODE MTZ5.1C		407 164 9908	ZENER DIODE UZ-6.8BCA
	407 056 8200	ZENER DIODE RD5.1EB3	D647	407 012 4406	DIODE 1SS133
				407 012 5809	DIODE 1SS176

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
D648	407 053 4007	ZENER DIODE MTZ16C	C511	403 188 1607	MT-POLYPRO 0.1U J 100V
	407 054 7205	ZENER DIODE RD16EB3	COIL		
	407 164 7201	ZENER DIODE UZ-16BCC	L441	610 000 1046	LINEARITY COIL
D652	407 053 6803	ZENER DIODE MTZ5.6C	L442	610 219 0342	COIL
	407 057 0104	ZENER DIODE RD5.6EB3	L462	610 000 0261	COIL
	407 151 8501	ZENER DIODE UZ-5.6BCC	RESISTOR		
D654	407 012 4406	DIODE 1SS133	R451	401 064 5305	OXIDE-MT 1.5 J 2W
	407 012 5809	DIODE 1SS176	R463	401 025 4200	CARBON 1.8K JA 1/6W
D655	407 012 4406	DIODE 1SS133	R505	401 026 7002	CARBON 3.9K JA 1/6W
	407 012 5809	DIODE 1SS176	R506	401 025 7805	CARBON 2.2K JA 1/6W
D661	409 013 0104	IC HZT33	R507	401 024 6720	CARBON 100 JA 1/6W
	409 026 8005	IC L5630	R508	401 025 1605	CARBON 1.5K JA 1/6W
	409 057 5103	IC UPC574J	R509	401 057 7507	OXIDE-MT 0.82 JA 1W
D681	407 005 7308	DIODE EM01Z	R511	401 062 1200	OXIDE-MT 470 JA 1W
D682	407 053 6803	ZENER DIODE MTZ5.6C	R512	N/A	
	407 057 0104	ZENER DIODE RD5.6EB3	R513	401 058 3706	OXIDE-MT 1K JA 1W
	407 151 8501	ZENER DIODE UZ-5.6BCC	R521	402 037 1805	FUSIBLE RES 4.7 J- 1W
D683	407 005 7308	DIODE EM01Z	R864	401 038 7611	MT-GLAZE 560 JA 1/10W
D684	408 007 8607	DIODE 1N4148	MISCELLANEOUS		
	407 013 1206	DIODE 1S1555	Y07	645 008 4058	TERMINAL PLUG
D685	407 012 4406	DIODE 1SS133	ASSY,PWB,SIF F2RV 1AA0B10E230CA		
	407 012 5809	DIODE 1SS176	TRANSISTOR		
D831	407 005 4505	DIODE DS442X	Q3801	405 015 9701	TR 2SC2814-F4-TA
	407 013 1008	DIODE 1S1553		405 015 9909	TR 2SC2814-F5-TA
	407 013 4306	DIODE 1S2076A	Q3802	405 109 4407	TR BC848-B
	407 013 6508	DIODE 1S2471		405 015 8704	TR 2SC2812-L6-TA
D861	407 012 4406	DIODE 1SS133	INTEGRATED CIRCUIT		
	407 012 5809	DIODE 1SS176	IC3801	409 290 4307	IC TDA2545A/V4
D871	407 012 4406	DIODE 1SS133	IC3811	409 376 6300	IC TDA9821/V1
	407 012 5809	DIODE 1SS176	CAPACITOR		
D872	407 055 7907	ZENER DIODE RD3.6EL	C3801	403 069 9500	CERAMIC 0.01U Z 50V
MISCELLANEOUS			C3802	403 069 9500	CERAMIC 0.01U Z 50V
△F601	423 022 2102	FUSE 250V 4A	C3803	403 069 9500	CERAMIC 0.01U Z 50V
A101	645 017 2571	TUNER,U/V	C3804	403 073 9107	CERAMIC 4700P K 50V
A1901	645 007 1546	UNIT,REMOCON RECEIVER	C3805	403 166 8000	MT-POLYEST 0.33U J 63V
	610 224 5806	RC PREAMP 409-1L		403 260 2904	MT-COMPO 0.33U J 50V
TP-A	645 008 4058	TERMINAL, PLUG	C3806	403 028 4102	CERAMIC 56P J 50V
TP-B	645 008 4058	TERMINAL, PLUG	C3807	403 041 8804	ELECT 10U M 16V
TP-D	645 008 4058	TERMINAL, PLUG	C3808	403 069 9500	CERAMIC 0.01U Z 50V
TP-E	645 008 4058	TERMINAL, PLUG	C3811	403 041 8804	ELECT 10U M 16V
K001	645 005 5706	JACK, PHONE D3.6	C3812	403 069 9500	CERAMIC 0.01U Z 50V
	645 006 4708	JACK, PHONE D3.6	C3813	403 049 9803	ELECT 2.2U M 50V
K10B	645 004 2911	PLUG, 5P	C3814	403 049 9803	ELECT 2.2U M 50V
K1001	645 005 5867	SOCKET,RGB 21P	C3815	403 049 9803	ELECT 2.2U M 50V
	610 234 3779	SOCKET 21P	RESISTOR		
K1001Z	610 261 2813	MOUNTING-BRKT F2WV	R3801	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
K1002	645 005 5867	SOCKET,RGB 21P	R3802	401 037 5202	MT-GLAZE 100 JA 1/10W
	610 234 3779	SOCKET 21P	R3803	401 037 5608	MT-GLAZE 10K JA 1/10W
K1002Z	610 261 2813	MOUNTING-BRKT F2WV	R3804	401 037 9200	MT-GLAZE 1.8K JA 1/10W
K11A	645 004 2881	PLUG, 2P	R3805	401 038 3504	MT-GLAZE 330 JA 1/10W
K1101	645 016 6433	JACK,RCA-3	R3806	401 038 7502	MT-GLAZE 56 JA 1/10W
KSC	645 008 4058	TERMINAL PLUG	R3807	401 039 0304	MT-GLAZE 820 JA 1/10W
△PS601	408 013 3801	TH PTH451C262BF140M270	R3808	401 038 7601	MT-GLAZE 560 JA 1/10W
SW1901	610 011 4432	SWITCH,PUSH	R3811	401 038 7601	MT-GLAZE 560 JA 1/10W
SW1902	610 011 4432	SWITCH,PUSH	R3814	401 038 7601	MT-GLAZE 560 JA 1/10W
SW1903	610 011 4432	SWITCH,PUSH	R3815	401 038 2200	MT-GLAZE 27K JA 1/10W
SW1904	610 011 4432	SWITCH,PUSH	R3845	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
SW501	610 011 2728	SWITCH,LEVER 1P-3T	R3846	401 037 5004	MT-GLAZE 0.000 ZA 1/10W
△SW601	645 003 6811	SWITCH,PUSH POWER 2P-2T	TRANSFORMER		
X131	421 002 2609	SAW F TSF5315	T3801	610 037 4522	S COIL
	421 003 3902	SAW F TSF5315U	MISCELLANEOUS		
X151	610 015 2854	TRAP,CERAMIC 5.5MHZ	K38H1	610 012 4561	TERMINAL 4P
X152	610 015 3011	TRAP,CERAMIC 6.5MHZ	K38H2	610 012 4561	TERMINAL 4P
X201	610 249 5577	CRYSTAL OSCILLATOR	X3801	421 006 2902	SAW F OFWG9251M
X871	645 015 8339	OSC,CRYSTAL 12MHZ	X3811	645 003 2806	CERAMIC FILTER
			X3814	645 006 3022	CERAMIC FILTER 5.742MHZ
ASSY,PWB,MAIN F3SGV 1AA0B10H015Q0					
(SAME AS 1AA0B10H015R0 EXCEPT FOR THE FOLLOWING DIFFERENCES)					
CAPACITOR					
C422	403 083 4901	POLYPRO 0.027U J 400V			
△C423	404 040 7805	MT-POLYPRO 5600P J 1.5K			
C424	403 083 3409	POLYPRO 0.015U J 400V			

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
ASSY,PWB,AUDIO F2RV 1AA0B10E230CB					
TRANSISTOR					
Q1251	405 109 4407	TR BC848-B	C3478	403 048 6308	ELECT 0.47U M 50V
	405 015 8704	TR 2SC2812-L6-TA	C3480	403 192 5905	CERAMIC 0.1U K 25V
Q1252	405 109 4407	TR BC848-B		403 070 0909	CERAMIC 0.1U K 50V
	405 015 8704	TR 2SC2812-L6-TA	C3481	403 069 9500	CERAMIC 0.01U Z 50V
Q3431	405 109 4407	TR BC848-B	C3482	403 043 9106	ELECT 47U M 16V
	405 015 8704	TR 2SC2812-L6-TA	C3483	403 069 9500	CERAMIC 0.01U Z 50V
Q3432	405 109 4407	TR BC848-B	C3484	403 043 9106	ELECT 47U M 16V
	405 015 8704	TR 2SC2812-L6-TA	C3485	403 086 1808	NP-ELECT 0.47U M 50V
Q3481	405 109 4407	TR BC848-B	C3486	403 086 1808	NP-ELECT 0.47U M 50V
	405 015 8704	TR 2SC2812-L6-TA	C3487	403 069 9500	CERAMIC 0.01U Z 50V
Q3482	405 109 4407	TR BC848-B	C3488	403 043 9106	ELECT 47U M 16V
	405 015 8704	TR 2SC2812-L6-TA	C3490	403 009 5708	CERAMIC 100P J 50V
Q3483	405 109 4407	TR BC848-B	C3491	403 130 3604	CERAMIC 0.047U K 25V
	405 015 8704	TR 2SC2812-L6-TA		403 130 3109	CERAMIC 0.047U K 50V
Q3484	405 109 4407	TR BC848-B	C3492	403 041 8804	ELECT 10U M 16V
	405 015 8704	TR 2SC2812-L6-TA	C3493	403 069 9500	CERAMIC 0.01U Z 50V
			C3494	403 043 9106	ELECT 47U M 16V
INTEGRATED CIRCUIT			RESISTOR		
IC1251	409 009 2501	IC HD14052BP	R1251	401 038 2101	MT-GLAZE 2.7K JA 1/10W
	409 120 7607	IC MN4052B	R1252	401 038 9209	MT-GLAZE 6.8K JA 1/10W
	409 051 2801	IC TC4052BP	R1253	401 039 0502	MT-GLAZE 82K JA 1/10W
	409 059 2209	IC UPD4052BC	R1254	401 039 0502	MT-GLAZE 82K JA 1/10W
IC3401	409 371 6206	IC TDA9840/V2	R1257	401 038 6307	MT-GLAZE 470 JA 1/10W
IC3431	409 316 4601	IC TDA8424	R1258	401 038 0701	MT-GLAZE 2.2K JA 1/10W
IC3451	QSAA7283ZPM2	IC SAA7283ZP/M2	R1262	401 039 0502	MT-GLAZE 82K JA 1/10W
			R1264	401 039 0502	MT-GLAZE 82K JA 1/10W
			R1265	401 038 6307	MT-GLAZE 470 JA 1/10W
			R1266	401 038 0701	MT-GLAZE 2.2K JA 1/10W
CAPACITOR			R3401	401 037 5202	MT-GLAZE 100 JA 1/10W
C1251	403 041 8804	ELECT 10U M 16V	R3402	401 037 5202	MT-GLAZE 100 JA 1/10W
C34TM	403 069 9500	CERAMIC 0.01U Z 50V	R3403	401 038 3108	MT-GLAZE 30K JA 1/10W
C3401	403 041 8804	ELECT 10U M 16V	R3431	401 037 5202	MT-GLAZE 100 JA 1/10W
C3402	403 069 5601	CERAMIC 0.01U K 50V	R3432	401 037 5202	MT-GLAZE 100 JA 1/10W
C3403	403 068 0409	CERAMIC 0.1U Z 25V	R3433	401 037 5202	MT-GLAZE 100 JA 1/10W
	403 070 2606	CERAMIC 0.1U Z 50V	R3434	401 037 7909	MT-GLAZE 1.5K JA 1/10W
C3404	403 310 5008	CERAMIC 3300P G 25V	R3435	401 037 5202	MT-GLAZE 100 JA 1/10W
C3405	403 042 2405	ELECT 100U M 16V	R3436	401 037 7909	MT-GLAZE 1.5K JA 1/10W
C3406	401 037 5004	MT-GLAZE 0.000 ZA 1/10W	R3461	401 037 5400	MT-GLAZE 1K JA 1/10W
C3407	403 026 2803	CERAMIC 47P J 50V	R3462	401 037 5202	MT-GLAZE 100 JA 1/10W
C3408	403 049 9803	ELECT 2.2U M 50V	R3463	401 037 5608	MT-GLAZE 10K JA 1/10W
C3409	403 049 9803	ELECT 2.2U M 50V	R3464	401 038 6505	MT-GLAZE 47K JA 1/10W
C3411	403 069 5601	CERAMIC 0.01U K 50V	R3465	401 037 5806	MT-GLAZE 1M JA 1/10W
C3412	403 069 5601	CERAMIC 0.01U K 50V	R3466	401 037 5608	MT-GLAZE 10K JA 1/10W
C3414	403 049 9803	ELECT 2.2U M 50V	R3467	401 038 9407	MT-GLAZE 680K JA 1/10W
C3421	403 069 9500	CERAMIC 0.01U Z 50V	R3468	401 037 9200	MT-GLAZE 1.8K JA 1/10W
C3422	403 041 8804	ELECT 10U M 16V	R3469	401 038 3702	MT-GLAZE 33K JA 1/10W
C3431	403 041 8804	ELECT 10U M 16V	R3471	401 037 5202	MT-GLAZE 100 JA 1/10W
C3432	403 042 2405	ELECT 100U M 16V	R3472	401 037 5202	MT-GLAZE 100 JA 1/10W
C3433	403 041 8804	ELECT 10U M 16V	R3473	401 038 3603	MT-GLAZE 3.3K JA 1/10W
C3434	403 068 0409	CERAMIC 0.1U Z 25V	R3474	401 038 7700	MT-GLAZE 5.6K JA 1/10W
	403 070 2606	CERAMIC 0.1U Z 50V	R3475	401 038 7700	MT-GLAZE 5.6K JA 1/10W
C3435	403 068 3202	CERAMIC 0.033U K 25V	R3476	401 038 3603	MT-GLAZE 3.3K JA 1/10W
	403 073 1200	CERAMIC 0.033U K 50V	R3477	401 038 0701	MT-GLAZE 2.2K JA 1/10W
C3436	403 074 7607	CERAMIC 5600P K 50V	R3479	401 038 0701	MT-GLAZE 2.2K JA 1/10W
C3437	403 074 7607	CERAMIC 5600P K 50V	R3481	401 038 0701	MT-GLAZE 2.2K JA 1/10W
C3438	403 068 3202	CERAMIC 0.033U K 25V	R3482	401 038 0701	MT-GLAZE 2.2K JA 1/10W
	403 073 1200	CERAMIC 0.033U K 50V	TRANSFORMER		
C3456	403 069 9500	CERAMIC 0.01U Z 50V	T3401	645 015 7943	COIL,FERRITE 2.5M
C3458	403 073 3501	CERAMIC 390P K 50V	COIL		
C3461	403 069 9500	CERAMIC 0.01U Z 50V	L3452	645 008 2221	INDUCTOR, 2.2U K
C3462	403 041 8804	ELECT 10U M 16V	L3453	401 025 7102	CARBON 22 JA 1/6W
C3463	403 008 7406	CERAMIC 10P D 50V	L3454	645 008 2221	INDUCTOR, 2.2U K
C3464	403 041 8804	ELECT 10U M 16V	L3455	645 008 2221	INDUCTOR, 2.2U K
C3465	403 018 7403	CERAMIC 220P J 50V	L3461	645 008 1996	INDUCTOR, 10U J
C3466	403 069 9500	CERAMIC 0.01U Z 50V	DIODE		
C3467	403 041 8804	ELECT 10U M 16V	D3461	407 169 7909	VARACTOR DI BBY31
C3468	403 069 9500	CERAMIC 0.01U Z 50V	D3462	407 004 8009	DIODE DSB015-TA
C3469	403 049 0008	ELECT 1U M 50V	MISCELLANEOUS		
C3471	403 069 9500	CERAMIC 0.01U Z 50V	K12A	645 004 2881	PLUG, 2P
C3472	403 041 8804	ELECT 10U M 16V	K12B	645 004 2911	PLUG, 5P
C3473	403 072 1607	CERAMIC 0.022U K 50V	K34A	645 008 3341	PLUG, 10P
C3474	403 192 5905	CERAMIC 0.1U K 25V	K34B	645 008 3341	PLUG, 10P
	403 070 0909	CERAMIC 0.1U K 50V			
C3475	403 026 2803	CERAMIC 47P J 50V			
C3476	403 026 2803	CERAMIC 47P J 50V			
C3477	403 069 9500	CERAMIC 0.01U Z 50V			

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
X3401	645 016 6662	OSC, CRYSTAL 10MHZ	DIODE		
X3461	645 007 7449	OSC, CRYSTAL 8.192MHZ	D2601	407 013 1206	DIODE 1S1555
ASSY,PWB,CRT F2RC 1AA0B10E24500			D2611	407 013 1206	DIODE 1S1555
TRANSISTOR			D2621	407 013 1206	DIODE 1S1555
Q2601	405 041 6507	TR 2SC2621-D-RA	D2651	407 013 1206	DIODE 1S1555
	405 041 6705	TR 2SC2621-E-RA	MISCELLANEOUS		
	405 066 9903	TR 2SC2688(1)-K	K26M	645 008 4058	TERMINAL, PLUG
	405 067 0008	TR 2SC2688(1)-L	K26P	645 004 2911	PLUG, 5P
	405 067 0107	TR 2SC2688(1)-M	K26Q	645 004 2898	PLUG, 3P
Q2611	405 041 6507	TR 2SC2621-D-RA	K2601-B	610 233 7990	CRT SOCKET
	405 041 6705	TR 2SC2621-E-RA	OUT OF CIRCUIT -F3SGM		
	405 066 9903	TR 2SC2688(1)-K	PICTURE TUBE (PANASONIC)		
	405 067 0008	TR 2SC2688(1)-L	△Q901	414 008 6306	CRT A66ECF20X05
	405 067 0107	TR 2SC2688(1)-M	COIL		
Q2621	405 041 6507	TR 2SC2621-D-RA	△L901	645 003 0048	COIL, DEGAUSSING
	405 041 6705	TR 2SC2621-E-RA		645 003 0055	COIL, DEGAUSSING
	405 066 9903	TR 2SC2688(1)-K	MISCELLANEOUS		
	405 067 0008	TR 2SC2688(1)-L	SP901	645 002 4313	SPEAKER, 8
	405 067 0107	TR 2SC2688(1)-M	SP902	645 002 4313	SPEAKER, 8
Q2640	406 007 1901	TR JC556A	△W901	645 012 7632	ASSY, CORD, POWER
	406 007 1802	TR JC556B	W902	610 252 5601	ASSY, WIRE GND CONNECTOR E
	405 004 4205	TR 2SA608-E-CTV-NP	OUT OF CIRCUIT -F3SGV		
	405 004 4809	TR 2SA608-F-CTV-NP	PICTURE TUBE (VIDEOCOLOR)		
	405 028 7909	TR 2SA608-G-CTV-NP	△Q901	414 007 1203	CRT A66ECY13X38
Q2651	406 007 1901	TR JC556A	COIL		
	406 007 1802	TR JC556B	△L901	645 003 0048	COIL, DEGAUSSING
	405 004 4205	TR 2SA608-E-CTV-NP		645 003 0055	COIL, DEGAUSSING
	405 004 4809	TR 2SA608-F-CTV-NP	MISCELLANEOUS		
	405 028 7909	TR 2SA608-G-CTV-NP	SP901	645 002 4313	SPEAKER, 8
CAPACITOR			SP902	645 002 4313	SPEAKER, 8
C2601	403 074 5702	CERAMIC 560P K 50V	△W901	645 012 7632	ASSY, CORD, POWER
C2611	403 074 5702	CERAMIC 560P K 50V	W902	610 252 5601	ASSY, WIRE GND CONNECTOR E
C2621	403 074 5702	CERAMIC 560P K 50V			
C2631	403 077 2708	CERAMIC 1000P P 2K			
C2635	403 055 8401	ELECT 22U M 250V			
	403 260 0405	ELECT 22U M 250V			
C2651	403 201 5001	ELECT 330U M 16V			
RESISTOR					
R2601	401 018 2800	CARBON 330 JA 1/4W			
R2602	401 019 1901	CARBON 3.9K JA 1/4W			
R2603	401 012 5708	CARBON 1K JA 1/4W			
R2604	401 065 4604	OXIDE-MT 12K JA 2W			
R2605	401 009 6602	CARBON 3.3K JA 1/2W			
R2611	401 018 2800	CARBON 330 JA 1/4W			
R2612	401 019 1901	CARBON 3.9K JA 1/4W			
R2613	401 016 3809	CARBON 2.2K JA 1/4W			
R2614	401 065 4604	OXIDE-MT 12K JA 2W			
R2615-B	401 009 6602	CARBON 3.3K JA 1/2W			
R2621	401 018 2800	CARBON 330 JA 1/4W			
R2622	401 019 1901	CARBON 3.9K JA 1/4W			
R2623	401 015 2704	CARBON 1.8K JA 1/4W			
R2624	401 065 4604	OXIDE-MT 12K JA 2W			
R2625-B	401 009 6602	CARBON 3.3K JA 1/2W			
R2627	401 020 0801	CARBON 470 JA 1/4W			
R2641	401 020 2003	CARBON 4.7K JA 1/4W			
R2642	401 018 3807	CARBON 3.3K JA 1/4W			
R2644	401 017 0807	CARBON 270 JA 1/4W			
R2652	401 012 7009	CARBON 10K JA 1/4W			
R2653	401 012 7009	CARBON 10K JA 1/4W			
VARIABLE RESISTOR					
VR2601	645 003 5722	VR, SEMI, 4.7K N			
VR2602	645 003 5647	VR, SEMI, 1K N			
VR2611	645 003 5722	VR, SEMI, 4.7K N			
VR2612	645 003 5647	VR, SEMI, 1K N			
VR2621	645 003 5722	VR, SEMI, 4.7K N			
COIL					
L2601	645 008 0012	INDUCTOR, 330U K			
L2611	645 008 0012	INDUCTOR, 330U K			
L2621	645 008 0012	INDUCTOR, 330U K			

COLOUR TELEVISION

SANYO

CHASSIS SERIES

EB4

MODEL NUMBER:

28DN2

SERVICE REF.NO.

C25ER57N-03

The service Precaution:
The area enclosed by this line () is directly connected with AC mains voltage. When servicing the area, connect an isolating transformer between TV receiver and AC line to eliminate hazard of electric shock.

Product safety notice:
Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by a mark  in this circuit diagram show components whose values have special significance to product safety. It is particularly recommended that only parts specified on the part service manual be used for components replacement pointed out by the mark.

PRECAUZIONE DI SERVIZIO
L'area inclusa in questa linea () è collegata direttamente con la tensione della rete CA quando si serve l'area collegare un trasformatore isolante tra il ricevitore TV e la linea CA per eliminare il pericolo di scossa elettrica.

NOTIZIE SULLA SICUREZZA DI FUNZIONAMENTO
Ogni sostituzione di componenti va fatta tenendo conto della sicurezza di funzionamento. I componenti indicati sotto schema con il simbolo  hanno particolare importanza per il sicuro funzionamento del TV. I suddetti componenti devono essere sostituiti esclusivamente con quelli indicati nell'elenco.


Note sul diagramma di circuito :

- Tutte i valori di resistenza sono in ohm, K=1,000, M=1,000,000.
- Tutte le resistenze nominali watt sono di 1/6 a meno che sia specificato altrimenti.
- Eccetto per i condensatori elettrolitici, tutti i valori di capacitanza di meno di sono espressi in μF , e di più di 1 sono in pF. I varoli di capacitanza elettrolitici sono in μF .
- Tutti volt di capacitanza nominali sono di 50V a meno che sia indicato altrimenti.
- Tutti valori di induttanza sono in μH .
- I valori letti del voltaggio presi con un "VTVM" proven gono dal punto indicato sulla massa del chassis, i valori di voltaggio presi usando un segnale di barre colore sono con tutti i controlli alle loro posizioni normali ed il commutatore AFC in posizione "OFF". Il voltaggio puo variare con l'intensita del segnale.

- Le forme di onda furono prese con il segnale di barre colore e i controlli regolati oppure le forme di onda di immagine normale furono prese usando un oscillatore a larga banda ed una sonda bassa capacit .
- Rispetto a quando indicato su questo schema possono essere state introdotte delle modifiche.
- Il diodo 1S1555 possono essere sostituiti con 1S2473, 1S2076 oppure DS472 a meno che sia specificato altrimenti.
- I transistori possono essere sostituiti con 2SC536(Q,R,S), 2SC1740(Q,R,S), 2SC945A(Q,R,P) oppure 2SC1815(G,O,Y) a meno che sia specificato altrimenti.
- Il transistor 2SA608(E,F) puo essere sostituito con 2SA933(Q,R), 2SA564(QA,RA), oppure 2SA1015(O,Y) a meno che sia specificato altrimenti.



Circuit diagram notes :


- All resistance values are in ohms, K=1,000, M=1,000,000.
- All resistance rated wattages are 1/6W unless otherwise noted.
- Excepting electrolytic capacitors, all capacitance values of less than 1 are expressed in μF and more than 1 are pF.
- All capacitance rated voltages are 50V unless otherwise noted.
- All inductance values are in μH .
- Voltage readings taken a digital voltmeter are from point indicated chassis ground. Voltage readings taken by using a colour bar signal are with all controls at normal position. Some voltages may vary with signal strength.
- Waveforms were taken with colour bar and controls adjusted for normal picture. Waveforms were taken by using a wide band oscilloscope and a low capacity probe.

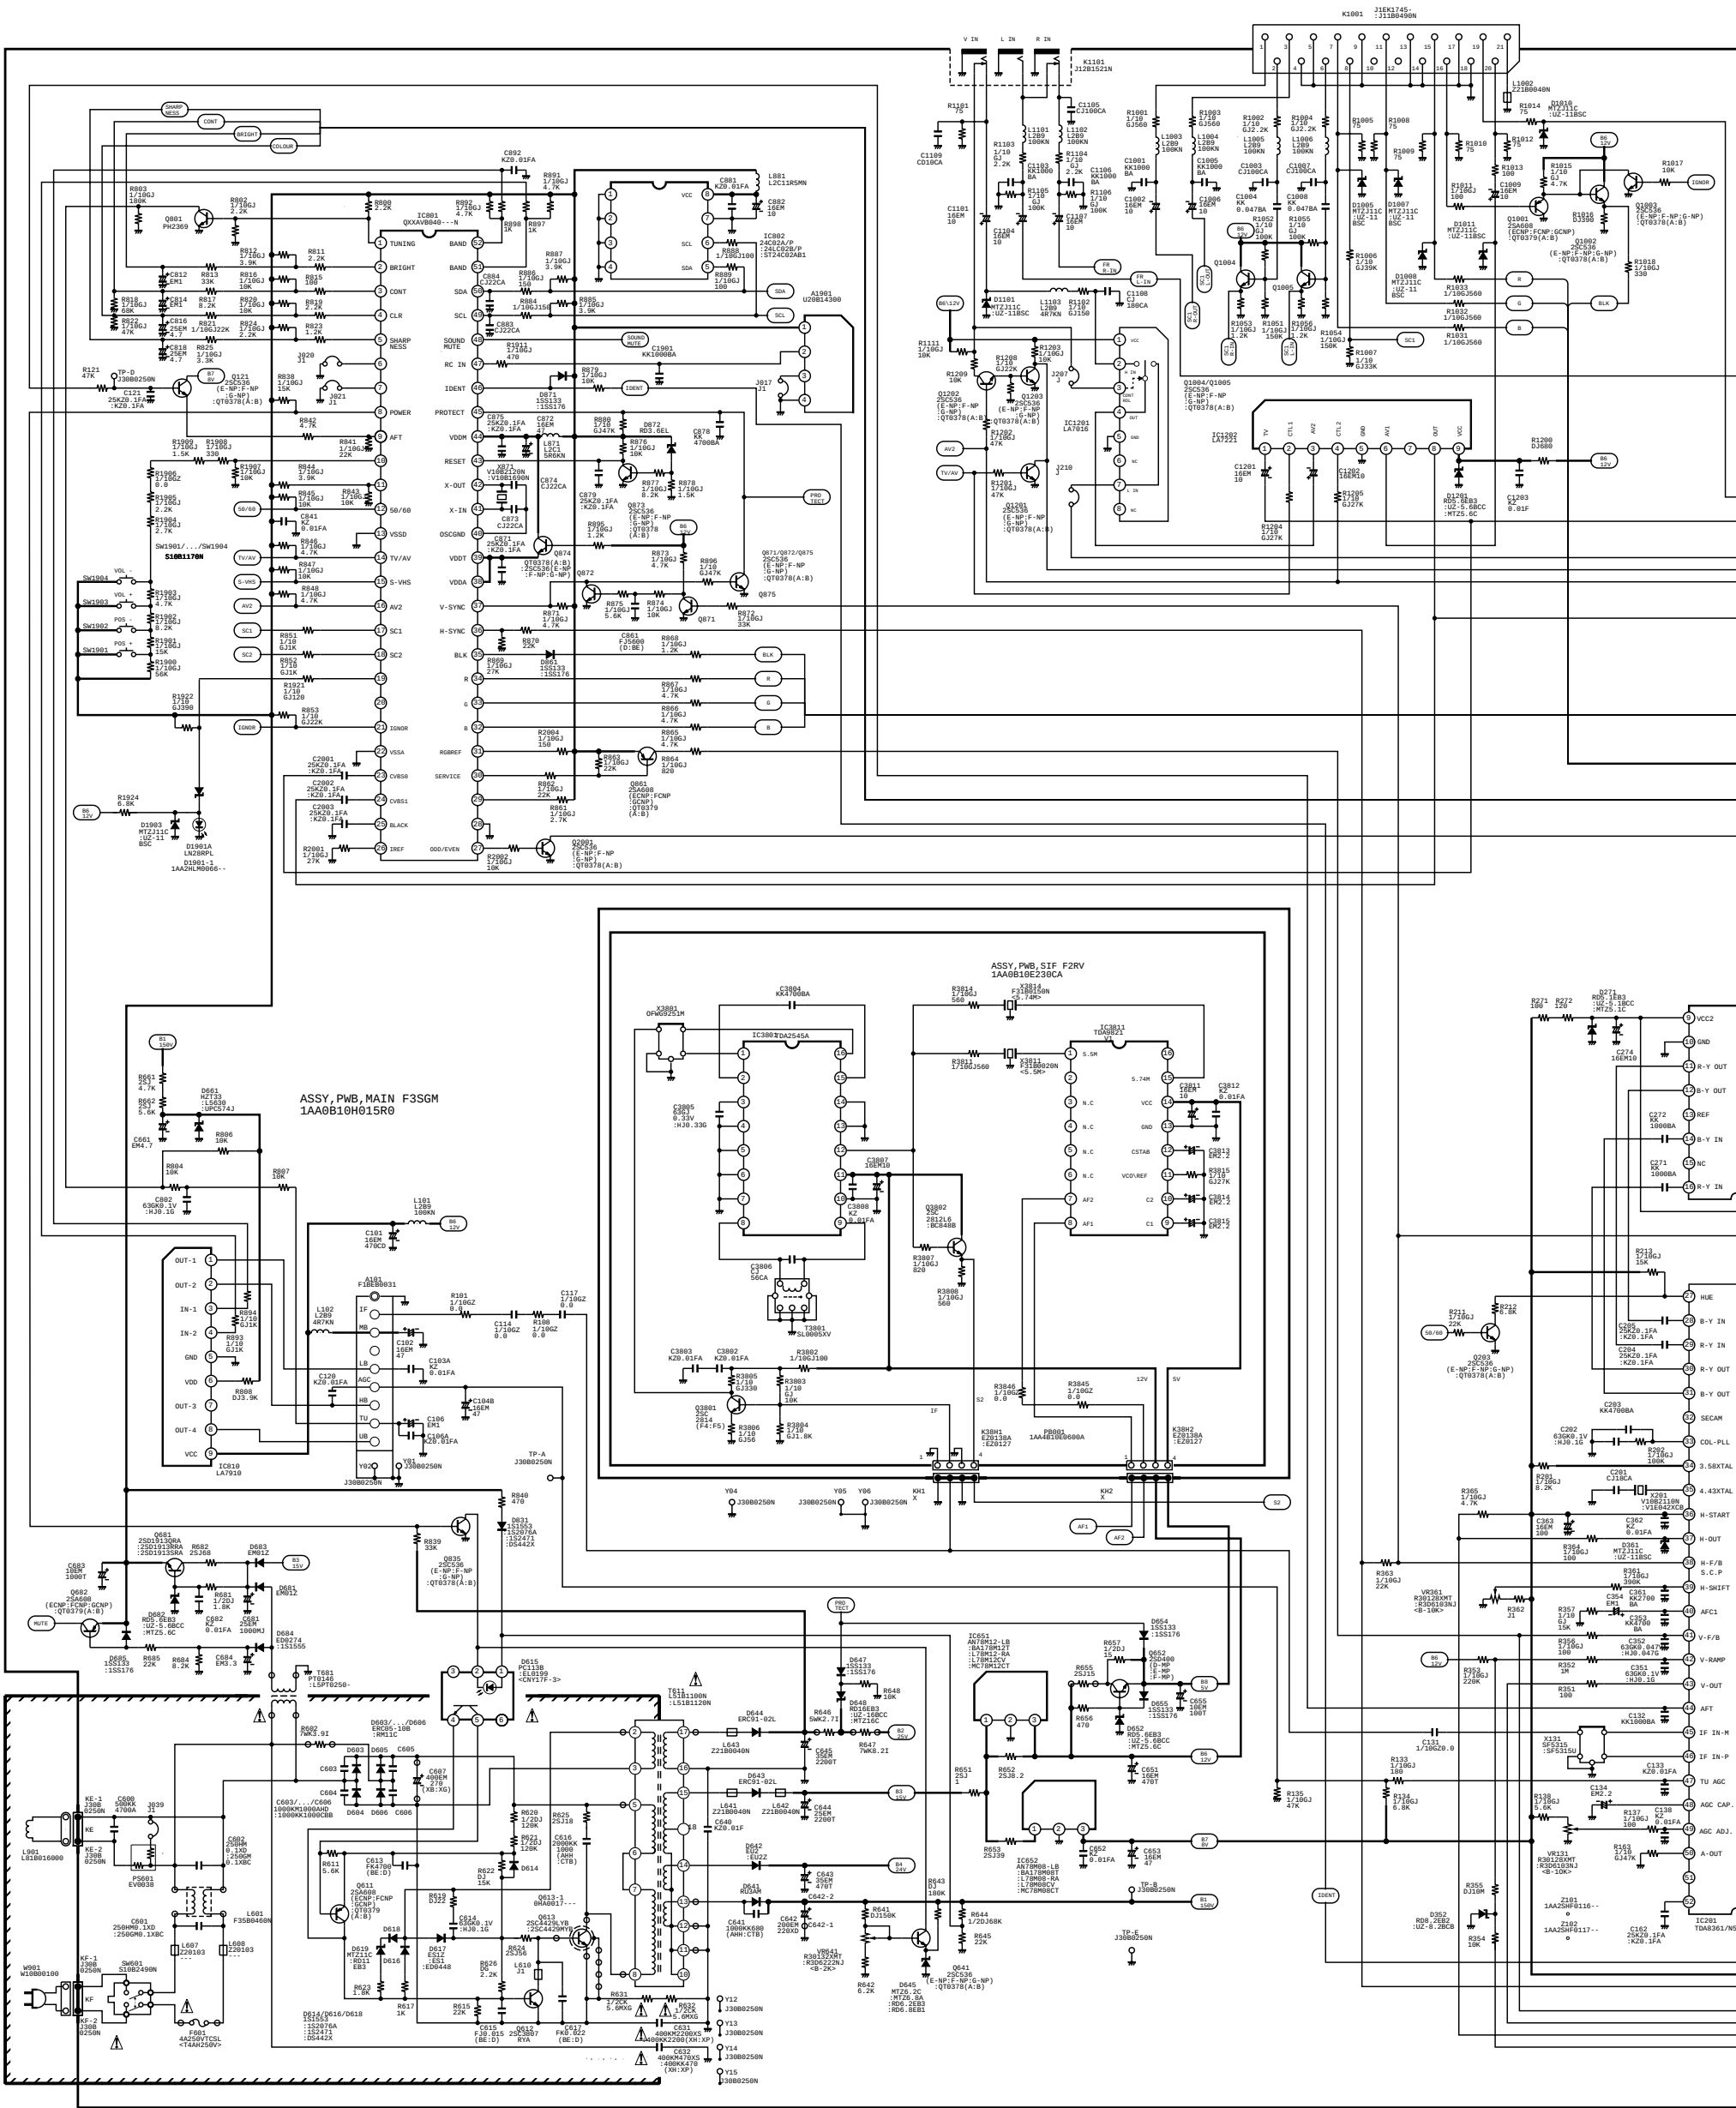

Main Board /Pannello Principale

Circuit side/Lato del Circuito

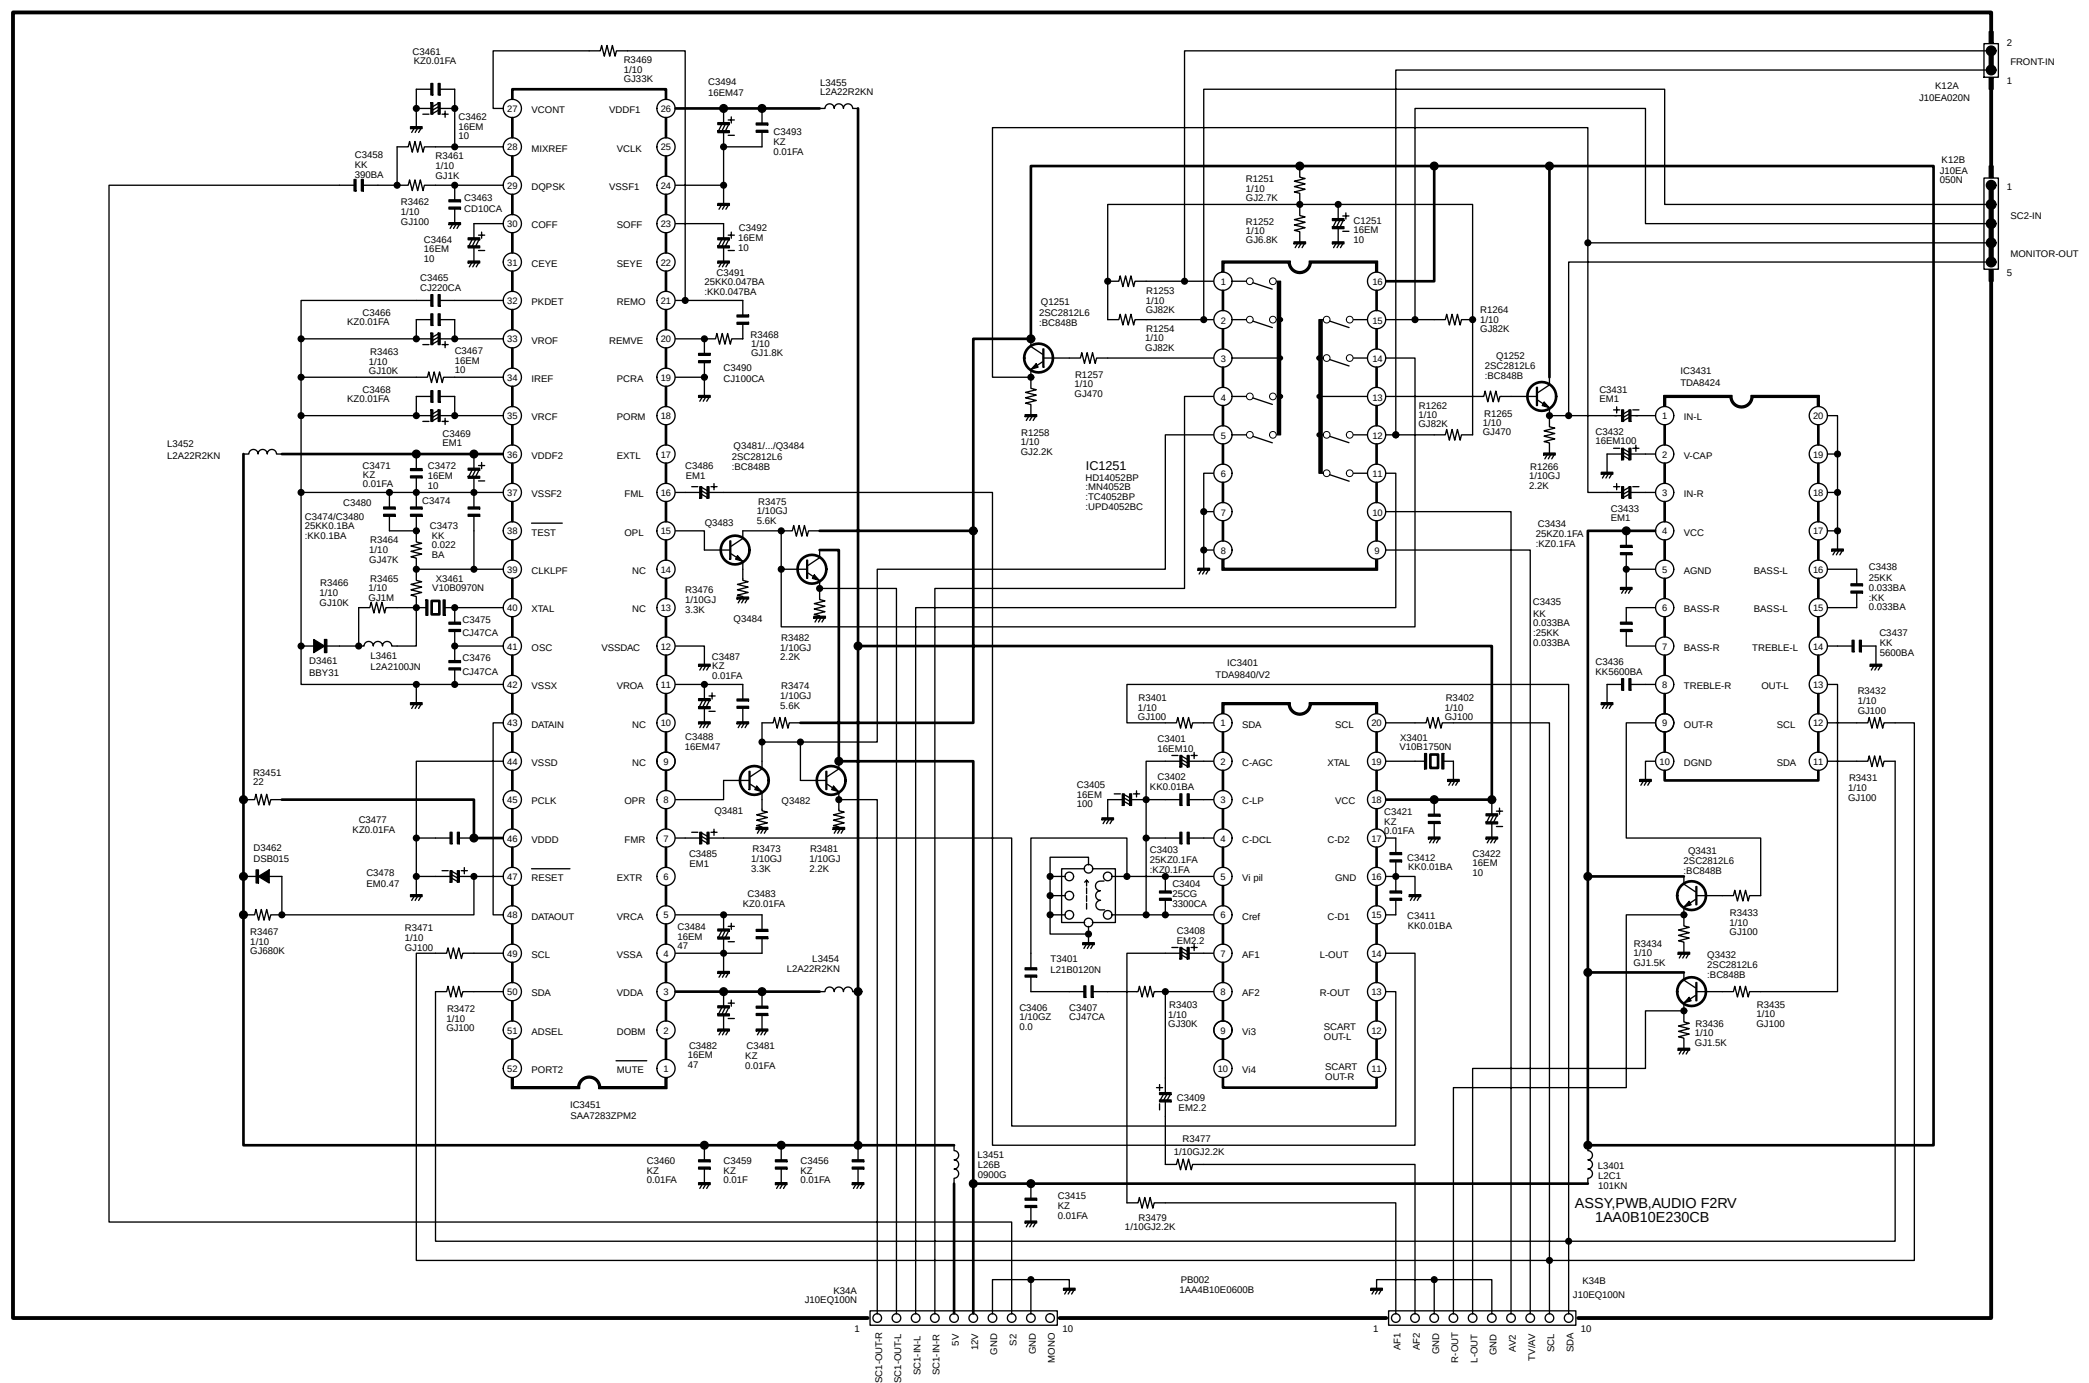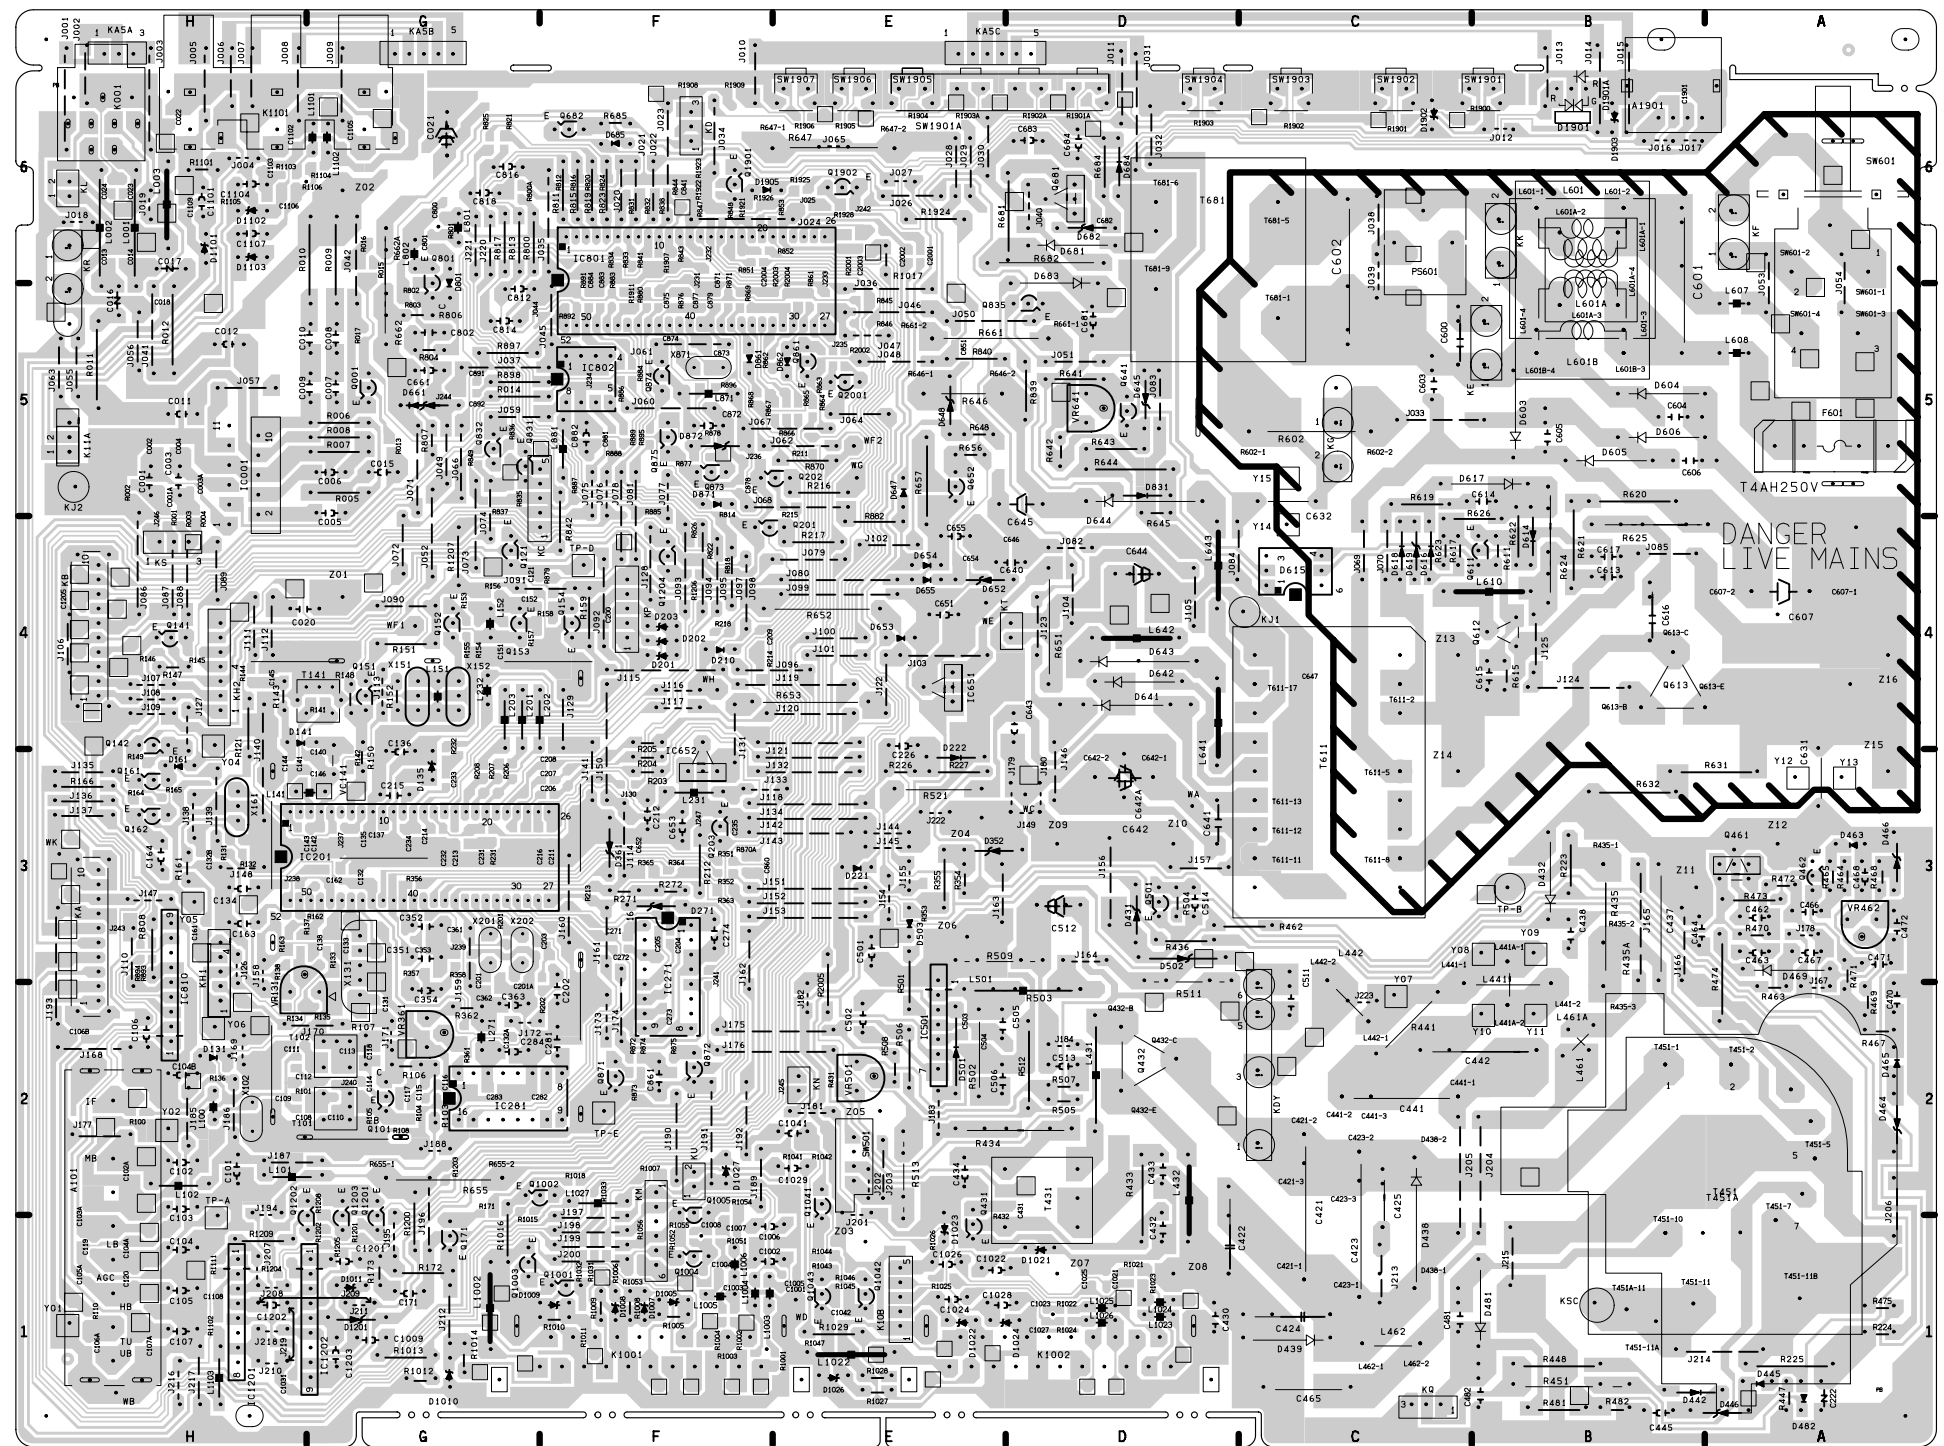

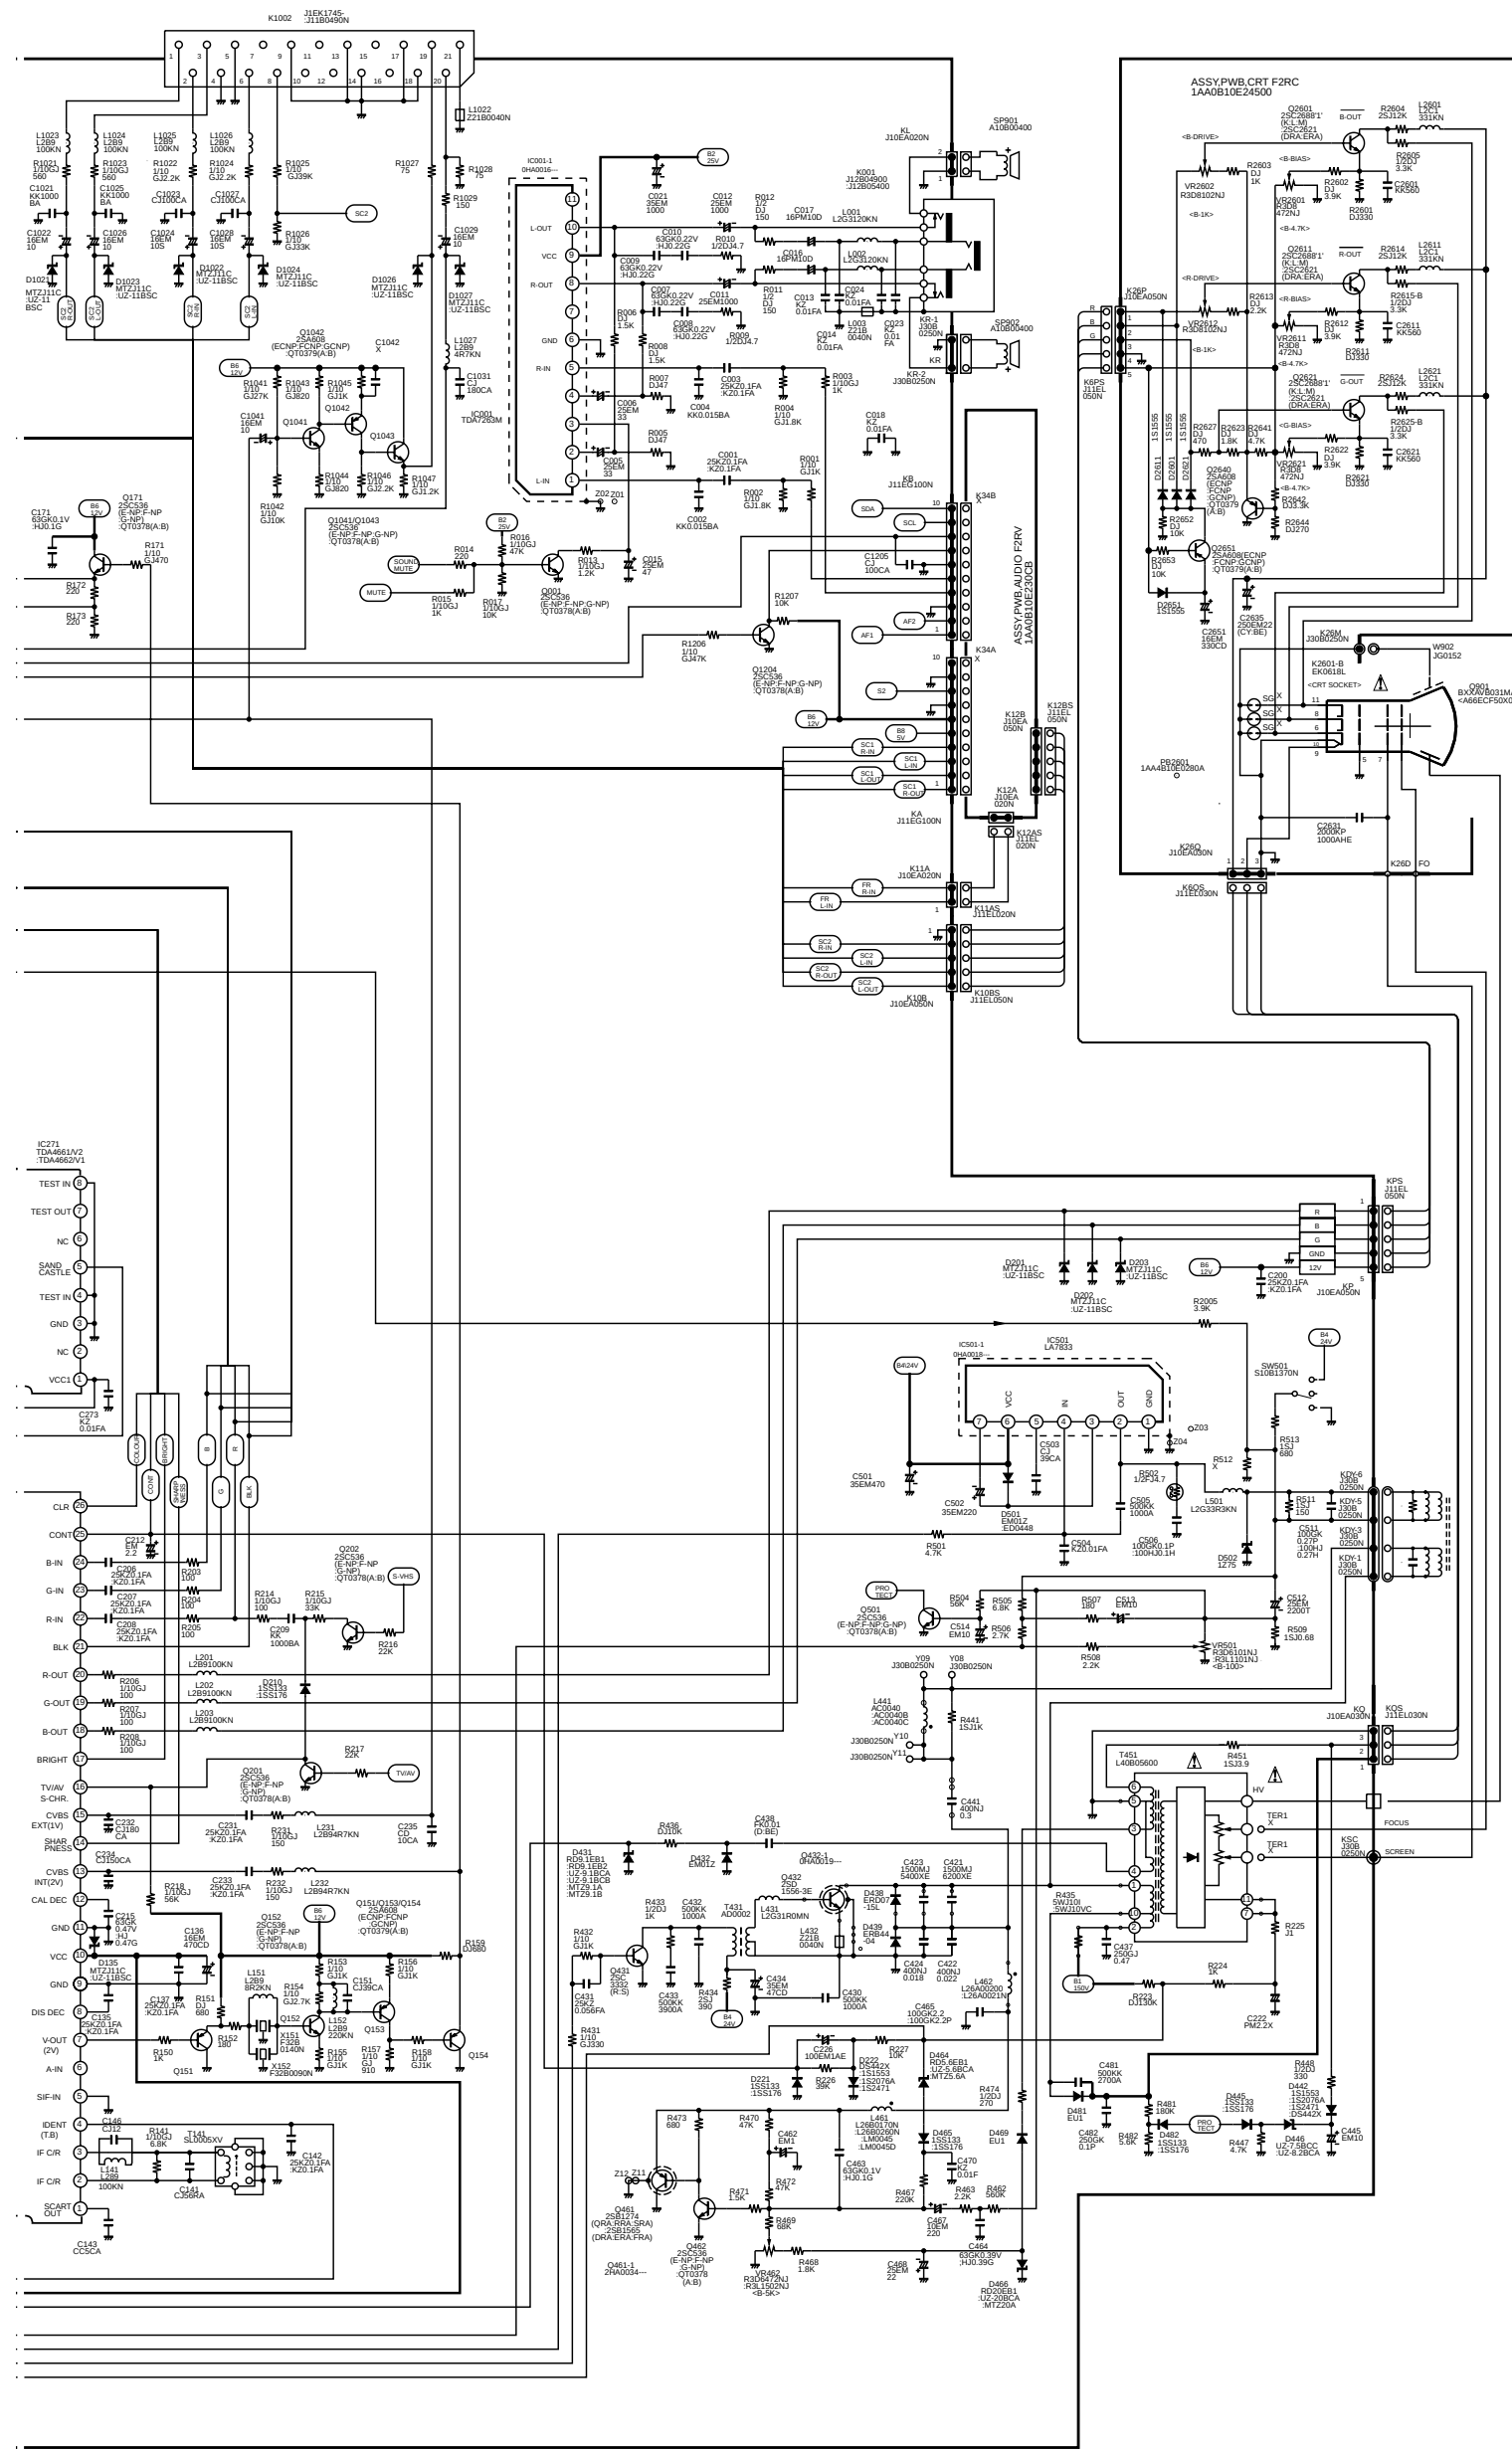

- This circuit diagram covers a basic or representative chassis only. There may be some components or partial circuit differences between the actual chassis and the circuit diagram.
- Diode 1S1555 may be replaced with 1S2473, 1S2076 or DS472 unless otherwise noted.
- Transistor 2SC536(Q,R,S), 2SC1740(Q,R,S), 2SC945A(Q,R,P) or 2SC1815(G,O,Y) unless otherwise noted.
- Transistor 2SA608(E,F) may be replaced with 2SA933(Q,R), 2SA564(QA,RA), or 2SA1015(O,Y) unless otherwise noted.

Expression of capacitance and resistance in circuit diagram.

Capacitance (Example)

1000 C M 2000 D

- Characteristic
- Capacitance value (220pF)
- Tolerance (±20%)
- Kind(Ceramic)
- Rated voltage (1,000V)

Resistance (Example)

1/2 N J 1.2


- Resistance value (1.2Ω)
- Tolerance (±5%)
- Kind (M.carbon)
- Rated wattage(1/2W)

J= ± 5%
K= ± 10%
M= ± 20%

T, A, U, D : Electrolytic
C, K, B : Ceramic
F : Mylar film
M, N : Polypropylene
Z : Metallized paper

D : Carbon
N : Metallized carbon
S : Oxide metallized
W : Wire winding
C : Solid

Waveforms on ICs and Transistors

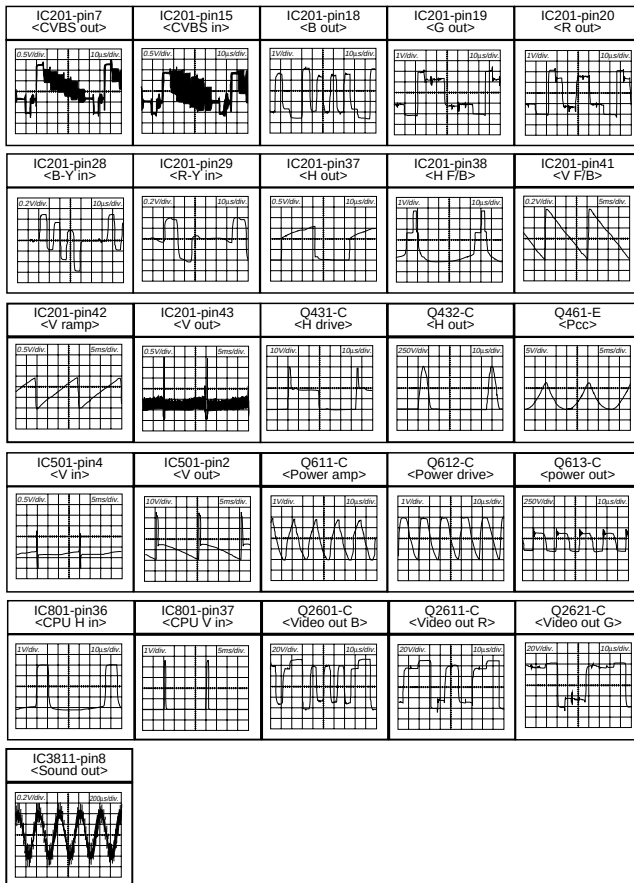


Voltage on ICs

IC001	1	1.6V	2	1.6V	3	15.5V	4	1.6V	5	1.6V	6	0V	7	-	8	13.8V	9	28.6V
IC201	1	3.1V	2	6.0V	3	6.0V	4	6.1V	5	0V	6	4.0V	7	3.1V	8	1.6V	9	0V
IC271	1	5.3V	2	0V	3	0V	4	0V	5	0.7V	6	0V	7	0V	8	0V	9	5.2V
IC501	1	0V	2	13.4V	3	25.3V	4	0.7V	5	0.7V	6	25.2V	7	2.1V				
IC651	1	14.5V	2	0V	3	11.9V												
IC801	1	0.6V	2	2.4V	3	3.7V	4	1.8V	5	2.1V	6	0V	7	0V	8	0V	9	2.6V
IC810	1	0.5V	11	2.5V	12	0V	13	0V	14	3.7V	15	0V	16	0V	17	0V	18	0V
IC1201	1	11.8V	2	7.8V	3	0V	4	7.1V	5	0V	6	0V	7	7.7V	8	0V		
IC1202	1	3.0V	2	2.0V	3	6.0V	4	0V	5	0V	6	2.7V	7	0V	8	1.7V	9	5.7V
IC1251	1	8.4V	2	8.4V	3	5.0V	4	8.4V	5	0V	6	0V	7	0V	8	0V	9	0V
IC3401	1	4.8V	2	3.4V	3	2.7V	4	2.5V	5	2.5V	6	2.5V	7	2.5V	8	2.5V	9	2.5V
IC3431	1	5.8V	2	11.7V	3	5.8V	4	11.8V	5	0V	6	0V	7	5.8V	8	5.8V	9	5.8V
IC3451	1	0V	2	0.3V	3	5.1V	4	0V	5	2.5V	6	0.4V	7	2.5V	8	2.5V	9	0V
IC3801	1	4.5V	2	4.6V	3	6.0V	4	0V	5	0V	6	0V	7	0V	8	5.3V	9	5.3V
IC3811	1	2.5V	2	0V	3	0V	4	0V	5	0V	6	0V	7	2.2V	8	2.2V	9	2.2V


Voltage on Transistors

Q001	Q121	Q151	Q152	Q153	Q154	Q171	Q201	Q202
E 0V	E 2.8V	E 3.8V	E 3.2V	E 9.3V	E 3.1V	E 2.5V	E 0V	E 0V
C 15.5V	C 8.0V	C 0V	C 8.7V	C 2.3V	C 0V	C 11.8V	C 0V	C 0.4V
B 0.1V	B 3.3V	B 3.2V	B 0V	B 8.7V	B 2.4V	B 3.1V	B 0.8V	B 0V
Q203	Q431	Q432	Q461	Q462	Q501	Q611	Q612	Q613
E 0V	E 0V	E 0V	E 12.9V	E 0V	E 0V	E 10.8V	E 0V	E 0V
C 6.0V	C 10.8V	C -	C 0V	C 12.9V	C 4.7V	C -1.4V	C -1.1V	C -
B 0V	B 0.3V	B 0V	B 13.5V	B 0.5V	B 0V	B 10.5V	B -1.1V	B -1.1V
Q641	Q652	Q681	Q682	Q801	Q835	Q861	Q871	Q872
E 6.3V	E 5.2V	E 5.0V	E 5.0V	E 0V	E 0V	E 5.0V	E 0V	E 0V
C 29.5V	C 8.3V	C 7.8V	C 0.1V	C 2.0V	C 29.4V	C 2.5V	C 6.3V	C 0.2V
B 6.7V	B 5.8V	B 5.7V	B 5.6V	B 0.6V	B 0V	B 5.0V	B 0.1V	B 0.6V
Q873	Q874	Q875	Q1001	Q1002	Q1003	Q1004	Q1005	Q1201
E 0V	E 4.9V	E 0V	E 0.6V	E 0.1V	E 0V	E 5.0V	E 5.0V	E 5.2V
C 0V	C 4.9V	C 4.7V	C 0V	C 11.8V	C 0.6V	C 11.9V	C 11.9V	C 0V
B 0.8V	B 5.6V	B 0V	B 0V	B 0.6V	B 0V	B 5.6V	B 5.9V	B 0.6V
Q1202	Q1203	Q1204	Q1041	Q1042	Q1043	Q1251	Q1252	Q1901
E 0V	E 0V	E 0V	E 2.4V	E 10.0V	E 3.4V	E 7.7V	E 7.9V	E 1.8V
C 0V	C 0V	C 11.9V	C 9.4V	C 4.0V	C 11.9V	C 11.9V	C 11.9V	C 5.0V
B 0V	B 0V	B 0V	B 3.0V	B 9.4V	B 4.0V	B 8.4V	B 8.4V	B 0.2V
Q1902	Q2001	Q2601	Q2611	Q2621	Q2640	Q2651	Q3431	Q3432
E 0V	E 0V	E 1.8V	E 1.8V	E 7.7V	E 1.5V	E 11.8V	E 5.2V	E 5.2V
C 5.0V	C 13.2V	C 134.3V	C 137.1V	C 143.8V	C 0V	C 0V	C 11.9V	C 11.9V
B 0.0V	B 0V	B 2.3V	B 2.2V	B 2.2V	B 0.9V	B 11.9V	B 5.9V	B 5.9V
Q3481	Q3482	Q3483	Q3484	Q3801	Q3802			
E 1.9V	E 7.7V	E 1.9V	E 7.7V	E 0.7V	E 5.2V			
C 8.4V	C 11.9V	C 8.4V	C 11.9V	C 6.1V	C 11.9V			
B 2.5V	B 8.4V	B 2.5V	B 8.4V	B 1.4V	B 5.9V			

Terminal guide

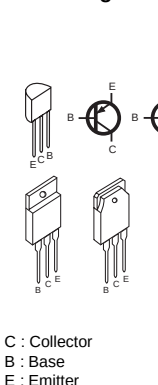

Chip Components

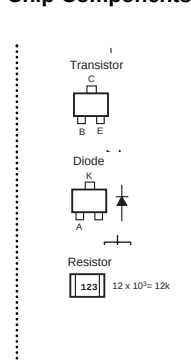

[illegible]

The diagram illustrates the VR601 camera module, which is a small, rectangular component with a lens and a flash. The module is shown in a perspective view, with its top and side surfaces visible. The top surface features a lens and a flash. The side surface shows several pins and connectors. The components are labeled as follows:

- VR611 R-BIAS**: A component connected to the top-left pin.
- VR621 G-BIAS**: A component connected to the top-right pin.
- VR601 B-BIAS**: A component connected to the bottom-left pin.
- VR612 R-DRIVE**: A component connected to the bottom-right pin.
- VR602 B-DRIVE**: A component connected to the bottom-most pin.
- Q611**: A component connected to the top-left pin.
- Q641**: A component connected to the top-right pin.
- Q621**: A component connected to the bottom-left pin.
- Q601**: A component connected to the bottom-right pin.

This map shows a section of the K340000 area, featuring a grid of numbered blocks and streets. The map includes various labels for streets and blocks, and a scale bar at the bottom indicating distances in miles.

IMPOSTAZIONE		Regolazione	Forma d'onda
Oscilloscopio Ingressi desidera SW di sistema Deviazione Modo	IC3401-pin5 Sistema B/G 27kHz Stereo	Servendosi di T3401, regolare "P" in modo che sia di ampiezza massima.	

REGOLAZIONE DELLA MESSA A FUOCO

Servendosi di FOCUS VR, regolare il controllo della messa a fuoco per una buona scansione delle linee.